



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
23.04.2003 Bulletin 2003/17

(51) Int Cl.7: **H04Q 7/38**

(21) Application number: **02090355.5**

(22) Date of filing: **17.10.2002**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
IE IT LI LU MC NL PT SE SK TR
 Designated Extension States:
AL LT LV MK RO SI

- Toshifumi, Sato
 Minato-ku, Tokyo (JP)
- Motoya, Iwasaki
 Minato-ku, Tokyo (JP)
- Takashi, Mochizuki
 Minato-ku, Tokyo (JP)
- Naoto, Ishii
 Minato-ku, Tokyo (JP)
- Kojiro, Hamabe
 Minato-ku, Tokyo (JP)

(30) Priority: **17.10.2001 JP 2001318793**

(71) Applicant: **NEC CORPORATION**
Tokyo (JP)

(72) Inventors:
 • Takahiro, Nobukiyo
 Minato-ku, Tokyo (JP)


(74) Representative: **Patentanwälte Wenzel & Kalkoff**
Grubessallee 26
22143 Hamburg (DE)

(54) **Transmission of quality information for high speed packet data communication mode**

(57) A HSDPA type mobile communication system includes a base station and a mobile station. The base station sets the uplink control channel with the mobile station to transmit a pilot signal. The mobile station measures a reception quality of the pilot signal to transmit the quality information to the base station using the uplink quality control channel. The base station per-

forms transmission control of data for the mobile station using the quality information. The mobile station is set to perform control of starting and stopping transmission of the quality information so that the quality information is transmitted only as required. Therefore, power consumption in the mobile station can be reduced, interference wave power in the uplink can be reduced, and capacity of the uplink can be increased.

FIG. 1

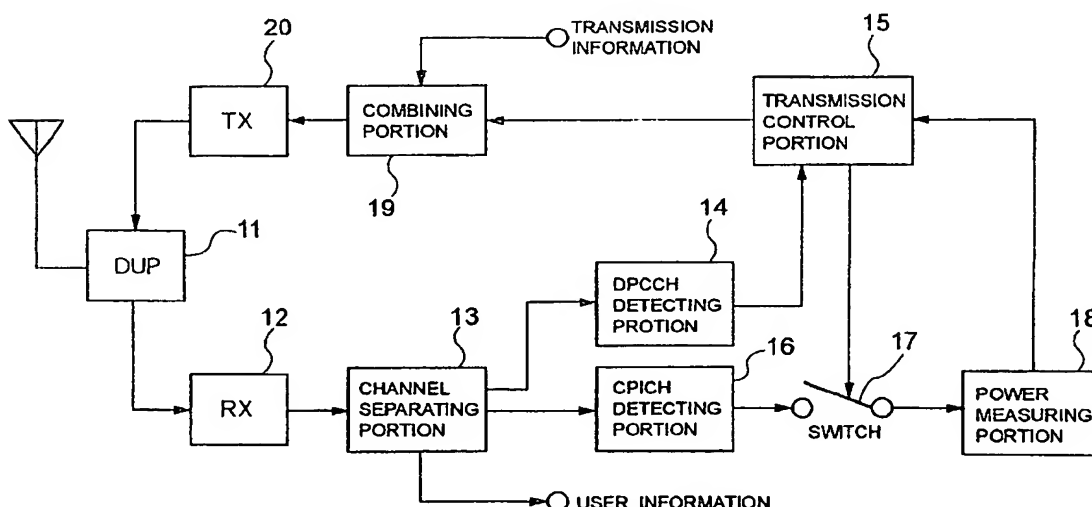

Description

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] The present invention relates generally to a mobile communication system, a communication control method, a base station and a mobile station to be used in the same. More particularly, the invention relates to a mobile communication system, a communication control method, a base station and a mobile station to be used in the same suitable for use in High Speed Downlink Packet Access (HSDPA) system for high speed data transmission in downlink from the base station to the mobile station.

Description of the Related Art

[0002] A study has been made for a high speed downlink packet access (HSDPA) system of this kind in Third Generation Partnership Project (3GPP). In the HSDPA system, a High Speed-Physical Downlink Shared Channel (HS-PDSCH) is used for downlink (DL) transmission from the base station to the mobile station. The HS-PDSCH is adapted for data transmission. One HS-PDSCH is shared by a plurality of mobile stations by sharing in time (time sharing).

[0003] In the HSDPA system, for controlling data transmission from the base station to the mobile station, an uplink Dedicated Physical Control Channel (DPCH) and an uplink High Speed-Dedicated Physical Control Channel (HS-DPCCH) are set between the base station and a plurality of mobile stations, respectively. The uplink (UL) DPCH is used for transmitting a control information, such as data transmission timing information and so forth from the mobile station to the base station. On the other hand, UL HS-DPCCH is used for transmission of Acknowledge/Negative Acknowledge (ACK/NACK) information of Hybrid-Automatic Repeat request (HARQ) (meaning of which will be discussed later) and quality information to the base station by the mobile station.

[0004] Here, quality means a quality (E_c/I_o : [energy per chip/Interference wave power per unit frequency]) of a Common Pilot Channel (CPICH) signal.

[0005] However, in such a conventional HSDPA system, in order to continue setting of UL DPCH and UL HS-DPCCH after initiation of setting of the HS-PDSCH, a large number of mobile stations which are unnecessary to transmit quality information, namely a large number of mobile stations not performing packet reception set HS-DPCCH to make UL interference power significant. Furthermore, a capacity of uplink radio channel is significantly limited.

[0006] Furthermore, since the mobile station continuously transmit the quality information, power consumption becomes significant to shorten operation period of

a battery. Also, since the base station performs transmission of the quality information at a predetermined timing and a predetermined interval, the base station cannot receive the quality information at the timing transmitting data to the mobile station.

SUMMARY OF THE INVENTION

[0007] It is an object of the present invention to provide a mobile communication system, a communication control method, a mobile station and a base station to be used in the same, which can reduce power consumption of the mobile station.

[0008] Another object of the present invention is to provide a mobile communication system, a communication control method, a mobile station and a base station to be used in the same, which can reduce interference wave power in uplink and whereby increase capacity of uplink.

[0009] According to the first aspect of the present invention, mobile communication system comprises:

a base station; and
a mobile station,
the base station transmitting a downlink signal;
the mobile station setting an uplink control channel with the base station, measuring a reception quality of the downlink signal, transmitting a quality information depending upon the reception quality using the uplink control channel,
the base station performing transmission control of data to the mobile station using the quality information,
the base station including means for transmitting data transmission notice to the mobile station by setting a downlink control channel with the mobile station, and
the mobile station including means for starting transmission of the quality information to the base station at a given interval in response to the data transmission notice while the uplink control channel is set.

[0010] According to the second aspect of the present invention, a mobile communication system comprises:

a base station; and
a mobile station,
the base station transmitting a downlink signal;
the mobile station setting an uplink control channel with the base station, measuring a reception quality of the downlink signal, transmitting a quality information depending upon the reception quality using the uplink control channel,
the base station performing transmission control of data to the mobile station using the quality information,
the mobile station including means for transmitting

the quality information at a given interval in response to reception of data, and means for transmitting a indication information indicating on transmission of the quality information using the uplink control channel.

[0011] According to the third aspect of the present invention, a mobile communication system comprises:

a base station; and
a mobile station,
the base station transmitting a downlink signal;
the mobile station setting an uplink control channel with the base station, measuring a reception quality of the downlink signal, transmitting a quality information depending upon the reception quality using the uplink control channel,
the base station performing transmission control of data to the mobile station using the quality information,
the base station including means for notifying a threshold value to the mobile station by setting downlink control channel, and
the mobile station including means for controlling transmission of the quality information to the base station at a given interval in response to a result of comparison of the threshold value and the reception quality.

[0012] According to the fourth aspect of the present invention, a mobile communication system comprises:

a base station; and
a mobile station,
the base station transmitting a downlink signal;
the mobile station setting an uplink control channel with the base station, measuring a reception quality of the downlink signal, transmitting a quality information depending upon the reception quality using the uplink control channel,
the base station performing transmission control of data to the mobile station using the quality information,
the base station including means for setting a downlink control channel with the mobile station and transmitting a command information indicative of a demand of reporting of the quality information to the mobile station in response to data transmission to the mobile station, and
the mobile station including means for transmitting the quality information to the base station in response to the command information.

[0013] According to the fifth aspect of the present invention, a communication control method in a mobile communication system including a base station and a mobile station, the base station transmitting a downlink signal, the mobile station setting an uplink control chan-

nel with the base station, measuring a reception quality of the downlink signal, transmitting a quality information depending upon the reception quality using the uplink control channel, and the base station performing transmission control of data to the mobile station using the quality information,

the communication control method comprises:

in the base station, step of transmitting data transmission notice to the mobile station by setting a downlink control channel with the mobile station, and

in the mobile station, step of starting transmission of the quality information to the base station at a given interval in response to the data transmission notice while the uplink control channel is set.

[0014] According to the sixth aspect of the present invention, a communication control method in a mobile communication system including a base station and a mobile station, the base station transmitting a downlink signal, the mobile station setting an uplink control channel with the base station, measuring a reception quality of the downlink signal, transmitting a quality information depending upon the reception quality using the uplink control channel, and the base station performing transmission control of data to the mobile station using the quality information,

the communication control method comprises:

in the mobile station, step of transmitting the quality information at a given interval in response to reception of data, and step of transmitting a indication information indicating transmission of the quality information using the uplink control channel.

[0015] According to the seventh aspect of the present invention, a communication control method in a mobile communication system including a base station and a mobile station, the base station transmitting a downlink signal, the mobile station setting an uplink control channel with the base station, measuring a reception quality of the downlink signal, transmitting a quality information depending upon the reception quality using the uplink control channel, and the base station performing transmission control of data to the mobile station using the quality information,

the communication control method comprises:

in the base station, step of notifying a threshold value to the mobile station by setting downlink control channel, and

in the mobile station, step of controlling transmission of the quality information to the base station at a given interval in response to a result of comparison of the threshold value and the reception quality.

[0016] According to the eighth aspect of the present

invention, communication control method in a mobile communication system including a base station and a mobile station, the base station transmitting a downlink signal, the mobile station setting an uplink control channel with the base station, measuring a reception quality of the downlink signal, transmitting a quality information depending upon the reception quality using the uplink control channel, and the base station performing transmission control of data to the mobile station using the quality information,

the communication control method comprises:

- in the base station, step of setting a downlink control channel with the mobile station and transmitting a command information indicative of a demand of reporting of the quality information to the mobile station in response to data transmission to the mobile station, and
- in the mobile station, step of transmitting the quality information to the base station in response to the command information.

[0017] According to the ninth aspect of the present invention, a mobile station in a mobile communication system including a base station and a mobile station, the base station transmitting a downlink signal, the mobile station setting an uplink control channel with the base station, measuring a reception quality of the downlink signal, transmitting a quality information depending upon the reception quality using the uplink control channel, the base station performing transmission control of data to the mobile station using the quality information,

the mobile station comprises:

- means for setting a downlink control channel with the base station and receiving a data transmission notice from the base station; and
- means for starting transmission of the quality information to the base station at a given interval in response to the data transmission notice while the uplink control channel is set.

[0018] According to the tenth aspect of the present invention, a mobile station in a mobile communication system including a base station and a mobile station, the base station transmitting a downlink signal, the mobile station setting an uplink control channel with the base station, measuring a reception quality of the downlink signal, transmitting a quality information depending upon the reception quality using the uplink control channel, the base station performing transmission control of data to the mobile station using the quality information,

the mobile station comprises:

- means for transmitting the quality information at a given interval in response to reception of data; and
- means for transmitting an indication information indicating transmission of the quality information us-

ing the uplink control channel.

[0019] According to the eleventh aspect of the present invention, a mobile station in a mobile communication system including a base station and a mobile station, the base station transmitting a downlink signal, the mobile station setting an uplink control channel with the base station, measuring a reception quality of the downlink signal, transmitting a quality information depending upon the reception quality using the uplink control channel, the base station performing transmission control of data to the mobile station using the quality information, the mobile station comprises:

- means for setting a downlink control channel with the base station and receiving a threshold value from the base station; and
- means for controlling transmission of the quality information to the base station at a given interval in response to a result of comparison of the threshold value and the reception quality.

[0020] According to the twelfth aspect of the present invention, a mobile station in a mobile communication system including a base station and a mobile station, the base station transmitting a downlink signal, the mobile station setting an uplink control channel with the base station, measuring a reception quality of the downlink signal, transmitting a quality information depending upon the reception quality using the uplink control channel, the base station performing transmission control of data to the mobile station using the quality information,

the mobile station comprises:

- means for setting a downlink control channel with the base station and receiving a command information indicative of a demand of reporting of the quality information in response to data transmission; and
- means for transmitting the quality information to the base station in response to the command information.

[0021] According to the thirteenth aspect of the present invention, a base station in a mobile communication system including a base station and a mobile station, the base station transmitting a downlink signal, the mobile station setting an uplink control channel with the base station, measuring a reception quality of the downlink signal, transmitting a quality information depending upon the reception quality using the uplink control channel, the base station performing transmission control of data to the mobile station using the quality information, the base station comprising:

- means for transmitting data transmission notice to the mobile station by setting a downlink control channel with the mobile station, and
- means for receiving the quality information from the

mobile station transmitting the quality information at a given interval in response to the data transmission notice while the uplink control channel is set.

[0022] According to the fourteenth aspect of the present invention, a base station in a mobile communication system including a base station and a mobile station, the base station transmitting a downlink signal, the mobile station setting an uplink control channel with the base station, measuring a reception quality of the downlink signal, transmitting a quality information depending upon the reception quality using the uplink control channel, the base station performing transmission control of data to the mobile station using the quality information, the base station comprising:

means for receiving the quality information at a given interval from the mobile station; and
means for receiving an indication information indicating transmission of the quality information from the mobile station using the uplink control channel.

[0023] According to the fifteenth aspect of the present invention, a base station in a mobile communication system including a base station and a mobile station, the base station transmitting a downlink signal, the mobile station setting an uplink control channel with the base station, measuring a reception quality of the downlink signal, transmitting a quality information depending upon the reception quality using the uplink control channel, the base station performing transmission control of data to the mobile station using the quality information, the base station comprising:

means for notifying a threshold value to the mobile station by setting downlink control channel; and
means for receiving the quality information from the mobile station at a given interval in response to a result of comparison of the threshold value and the reception quality.

[0024] According to the sixteenth aspect of the present invention, a base station in a mobile communication system including a base station and a mobile station, the base station transmitting a downlink signal, the mobile station setting an uplink control channel with the base station, measuring a reception quality of the downlink signal, transmitting a quality information depending upon the reception quality using the uplink control channel, the base station performing transmission control of data to the mobile station using the quality information, the base station comprising:

means for setting a downlink control channel with the mobile station and transmitting a command information indicative of a demand of reporting of the quality information to the mobile station in response to data transmission to the mobile station; and

means for receiving the quality information from the mobile station.

[0025] In the operation, in a HSDPA type mobile communication system, in which the base station sets the uplink control channel with the mobile station to transmit a pilot signal, the mobile station measures a reception quality of the pilot signal to transmit the quality information to the base station using the uplink quality control channel, and the base station performs transmission control of data for the mobile station using the quality information, the mobile station performs control of starting and stopping transmission of the quality information when the uplink HS-DPCCH is setting. Namely, transmission control of transmission of the quality information from the mobile station to the base station is only performed so that the quality information is transmitted only as required. Therefore, power consumption in the mobile station can be reduced, interference wave power in the uplink can be reduced, and capacity of the uplink can be increased.

BRIEF DESCRIPTION OF THE DRAWINGS

[0026] The present invention will be understood more fully from the detailed description given hereinafter and from the accompanying drawings of the preferred embodiment of the present invention, which, however, should not be taken to be limitative to the invention, but are for explanation and understanding only.

[0027] In the drawings:

Fig. 1 is a block diagram showing the preferred embodiment of a mobile station according to the present invention;

Fig. 2 is a block diagram showing the preferred embodiment of a base station according to the present invention;

Fig. 3 is a flowchart showing operation of the first embodiment of a base station according to the present invention;

Fig. 4 is a flowchart showing operation of the first embodiment of a mobile station according to the present invention;

Fig. 5 is an illustration for explaining the principle of the first embodiment;

Fig. 6 is an illustration for explaining the principle of the first embodiment;

Fig. 7 is an illustration showing examples of respective formats of DL DPCH and UL HS-DPCCH to be used in the first embodiment;

Fig. 8 is a flowchart showing operation of the second embodiment of a base station according to the present invention;

Fig. 9 is a flowchart showing operation of the second embodiment of a mobile station according to the present invention;

Fig. 10 is an illustration for explaining the principle

of the second embodiment;

Fig. 11 is a flowchart showing operation of the third embodiment of a base station according to the present invention;

Fig. 12 is a flowchart showing operation of the third embodiment of a mobile station according to the present invention;

Fig. 13 is an illustration for explaining the principle of the third embodiment;

Fig. 14 is an illustration for explaining the principle of the third embodiment;

Fig. 15 is an illustration showing examples of respective formats of DL DPCH and UL HS-DPCCH to be used in the third embodiment;

Fig. 16 is a flowchart showing operation of the fourth embodiment of a mobile station according to the present invention;

Fig. 17 is an illustration for explaining the principle of the fourth embodiment;

Fig. 18 is an illustration for explaining the principle of the fourth embodiment;

Fig. 19 is a flowchart showing operation of the fifth embodiment of a mobile station according to the present invention;

Fig. 20 is an illustration for explaining the principle of the fifth embodiment;

Fig. 21 is a flowchart showing operation of the sixth embodiment of a base station according to the present invention;

Fig. 22 is a flowchart showing operation of the sixth embodiment of a mobile station according to the present invention;

Fig. 23 is an illustration for explaining the principle of the sixth embodiment;

Fig. 24 is an illustration showing examples of respective formats of DL DPCH and UL HS-DPCCH to be used in the sixth embodiment;

Fig. 25 is a flowchart showing operation of the seventh embodiment of a base station according to the present invention;

Fig. 26 is a flowchart showing operation of the seventh embodiment of a mobile station according to the present invention;

Fig. 27 is an illustration for explaining the principle of the seventh embodiment;

Fig. 28 is an illustration showing examples of respective formats of DL DPCH and UL HS-DPCCH to be used in the seventh embodiment;

Fig. 29 is a flowchart showing operation of the eighth embodiment of a mobile station according to the present invention; and

Fig. 30 is an illustration for explaining the principle of the eighth embodiment.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0028] The present invention will be discussed here-

inafter in detail in terms of the preferred embodiments of the present invention with reference to the accompanying drawings. In the following description, numerous specific details are set forth in order to provide a thorough understanding of the present invention. It will be obvious, however, to those skilled in the art that the present invention may be practiced without these specific details.

[0029] Fig. 1 is a block diagram showing one embodiment of a basic construction of a mobile station according to the present invention, and Fig. 2 is a block diagram showing one embodiment of a base station according to the present invention.

[0030] Referring to Fig. 1, a received wave from an antenna is supplied to a receiving portion 12 via a duplexer (DUP) 11 and is demodulated therein. A demodulated output is separated into a user information and a control information by a channel separator 13. Among the control information, downlink (DL) dedicated physical control channel (DPCH) or DPCCH is detected by a DPCCH detecting portion 14 and is then supplied to a transmission control portion 15. The transmission control portion 15 makes analysis of DL DPCCH. When it is necessary to transmit the quality information to the base station, a switch 17 is turned ON to supply a result of detection in a Common Pilot Channel (CPICH) detecting portion 16 to a power measuring portion 18.

[0031] On the other hand, when the transmission control portion 15 makes analysis of DL DPCCH and thus makes judgment that transmission of the control information, such as quality information or the like to the base station is not necessary, the uplink is released. CPICH is detected by the CPICH detecting portion 16. When the switch 17 is ON, measurement of a received power is performed by a power measuring portion 18. The result of measurement is supplied to the transmission control portion 15. In the transmission control portion 15, the control information, such as quality information or the like to be transmitted to the base station is generated to supply to a combining portion 19. The combining portion 19 then generates a transmission information.

[0032] Here, the quality information means reception quality (E_c/I_o : [energy per chip/interference wave power per unit frequency]). The transmission information is transmitted to the base station via DUP 11 by being supplied to the transmitting portion 20 and modulated therein.

[0033] Referring to Fig. 2, a reception wave from the antenna is input to a receiving portion 22 via a duplexer (DUP) 21 and is processed for demodulation and so forth. Then, the processed reception wave is supplied to a received information separating portion 23. In the received information separating portion 23, a user information and various control information are separated. The control information is output to a transmission control portion 24. In the transmission control portion 24, a user data of the mobile station, in which a transmission power is determined on the basis of the quality informa-

tion as the control information supplied from the information separating portion 23, and control information to be notified to the mobile station, are generated to be supplied to a combining portion 25. In the combining portion 25, a transmission information is generated. The transmission information is supplied to the transmitting portion 26 and is processed for modulation and so forth to be transmitted to the mobile station via the DUP 21.

[0034] Next, operation of the shown embodiment will be discussed hereinafter in detail with reference to Figs. 3 to 7.

[0035] Fig. 3 is a flowchart showing a processing operation to be performed in the base station, in which processing operation of the base station to perform preliminary notice of data transmission and end notice of data transmission is realized. On the other hand, Fig. 4 is a flowchart showing operation of the mobile station, in which processing operation of the mobile station to perform reporting of quality information for the base station and releasing process for quality control channel is realized.

[0036] In the shown embodiment, after receiving the preliminary notice of data transmission transmitted by the base station, the mobile station transmits the quality information and receives the end notice of data transmission. Thereafter, since the mobile station stops transmission of the quality information, battery operation period of the mobile station can be expanded. Furthermore, upon stopping transmission of the quality information, uplink quality control channel is released, only a part of mobile stations among a large number of mobile stations set UL HS-DPCCH to reduce uplink interference power and to increase capacity of the uplink radio channel.

[0037] Referring to Fig. 3, the base station makes judgment whether the packet data demanded by the mobile station arrives to own station (S1). When the packet data arrives, a packet schedule of data to be transmitted to the mobile station is checked to perform preliminary notice of data transmission to the mobile station by using downlink dedicated physical control channel (DL DPCH) (S2). Arrival of the packet data to own station means that data demanded by the mobile station are stored in a buffer of the base station from information provider. One example of the information provider is WEB server. Next, upon transmission of the packet data, a check is performed whether the packet data to be transmitted is the final packet data to be transmitted to the mobile station (S3). If the packet data is the final packet data, the end notice of data transmission is performed to the mobile station using the dedicated physical control channel (DL DPCH) (S4).

[0038] Referring to Fig. 4, the mobile station checks whether the packet data is demanded or not (S101). If demanded, the channel for communication with the base station or a base station control unit is established in order to communicate the user information and the control information (S102). Next, the mobile station

makes judgment whether the preliminary notice of data transmission is received from the base station (S103). If the preliminary notice is received, the quality information is transmitted to the base station (S104). Next, judgment is made whether the end notice of data transmission is received from the base station (S105). If the end notice is received, check is performed whether the packet data is newly received or not (S106). If it is confirmed that the new packet data is not generated for a predetermined period (S107), the set uplink (hereinafter UL) HS-DPCH is released (S108).

[0039] Figs. 5 and 6 show conceptual illustration of principle of the first embodiment. In HSDPA system, in order to control data transmission from the base station to the mobile station, UL DPCH and UL HS-DPCCH are set. In the shown embodiment, since the control data of UL DPCH is used in transmission control of the quality information, UL DPCH is not illustrated in the drawings.

[0040] Fig. 5 shows a manner of transmission of the quality information with a given interval from the predetermined timing after reception of the preliminary notice of data transmission by the mobile station. In the shown embodiment (even in other embodiment), the interval of transmission is set constant at 3 TTI (Transmission Time Interval). However, upon implementation, the interval can be either constant or variable. Fig. 6 shows a manner of stopping transmission of quality information after reception of the end notice of data transmission by the mobile station. In the shown embodiment, while transmission of the quality information is stopped by releasing the UL HS-DPCCH, it is also possible to realize stopping of transmission of the quality information by making transmission power smaller.

[0041] Examples of respective formats of DL DPCH (Dedicated Physical Channel) for transmitting the preliminary notice of data transmission and UL HS-DPCCH (High Speed-Dedicated Physical Control Channel) for transmitting the quality information are shown in Fig. 7. DL DPCH consists of DPCCCH and DPDCH (Dedicated Physical Data Channel). DL DPCH includes a transmission power control (TPC) information, TFICI (Transport Format Combination Indicator), a pilot signal (dedicated) and the user data. TFICI is information indicative of number of transport channels multiplexed on a reception frame of the uplink DPDCH and information of transport format used by each transport channel. In the shown embodiment of the present invention, a part of a region of TFICI is used as a bit for preliminary notice of data transmission. A DL common channel may also be used in replace of DL DPCH.

[0042] The UL HS-DPCCH is the uplink control channel used for transmission of quality information ACK/NACK of HARQ. In the format of the shown embodiment, content of data is varied per 1TTI in sequential order of quality information, ACK/NACK of HARQ and other communication data. Here, HARQ indicates a system for inspection of received symbol by the mobile station for judgment whether re-transmission is to be re-

requested or not. Upon success of reception, ACK is transmitted.

[0043] Next, discussion will be given for the second embodiment of the present invention. In the former first embodiment, while the base station issues end notice of data transmission at step S4 of the flowchart in Fig. 3, the end notice is not issued in the second embodiment. In the second embodiment, when the mobile station makes judgment that the final packet data is received, reporting of the quality information is stopped. In the shown embodiment, after reception of the preliminary notice of data transmission transmitted by the base station, the mobile station transmits the quality information. After reception of the final packet data, the mobile station stops transmission of the quality information. Thus, battery operation period of the mobile station can be expanded. Furthermore, upon stopping transmission of the quality information, since uplink quality control channel is released, only a part of mobile stations among a large number of mobile stations set UL HS-DPCCH to reduce uplink interference power and to increase capacity of the uplink radio channel.

[0044] Fig. 8 is a flowchart showing operation of the base station, in which S4 is eliminated from the flowchart shown in Fig. 3. Namely, the control information to be notified to the mobile station is only preliminary notice of the data transmission. Fig. 9 is a flowchart showing operation of the mobile station, in which step S105 in the flowchart of the first embodiment shown in Fig. 4 is modified to step S111. Namely, after transmission of the quality information (S104), judgment is made whether the final packet data is received (S111). If the final packet data is received, judgment is made whether new packet data is demanded or not (S106).

[0045] Fig. 10 is a conceptual illustration showing the principle of the second embodiment of the present invention. Fig. 10 shows a manner of stopping transmission of the quality information by the mobile station after ending reception of all packet data. In the shown embodiment, transmission of quality information is stopped by releasing UL HS-DPCCH. However, it is also possible to realize stopping of transmission of the quality information by making transmission power small.

[0046] Next, discussion will be given for the third embodiment of the present invention. In the former two embodiments, at step S103 of the flowchart of Fig. 9, judgment is made whether the preliminary notice of data transmission is received from the base station by the mobile station, the preliminary notice of data transmission is not issued in the third embodiment. At the same time of transmission of the quality information, indicator information (hereinafter referred to as Feedback Indicator) indicative of transmission of the quality information is transmitted. By transmitting the Feedback Indicator by the mobile station, the base station may make judgment that the quality information is transmitted by the mobile station.

[0047] In the shown embodiment, the mobile station

transmits the quality information at a predetermined timing from setting of channel with the base station and terminates transmission of the quality information after receiving the final packet data. Therefore, battery operation period of the mobile station can be expanded. Furthermore, upon stopping transmission of the quality information, uplink quality control channel is released, only a part of mobile stations among a large number of mobile stations set UL HS-DPCCH to reduce uplink interference power and to increase capacity of the uplink radio channel. Furthermore, since Feedback Indicator is transmitted upon transmission of the quality information, the base station can certainly receive the quality information.

[0048] Fig. 11 is a flowchart showing operation of the base station, in which step S2 is eliminated from the flowchart of the second embodiment shown in Fig. 8. Namely, the base station does not issue notice of the control information to the mobile station. Judgment is made whether the packet data demanded by the mobile station is arrived or not (S1). If the packet data arrives, data is transmitted to the mobile station according to a scheduling. Then, judgment is made whether the packet data to be transmitted is the final packet or not (S3). If the packet data to be transmitted is the final packet, process is terminated.

[0049] Fig. 12 is a flowchart showing operation of the mobile station, in which the process in step S103 of flowchart of the second embodiment shown in Fig. 9 is modified to step S121, and the process in step S104 of flowchart of the second embodiment shown in Fig. 9 is modified to step S122. Namely, waiting a predetermined period after setting channel with the base station (S121), the mobile station transmits the Feedback Indicator and transmission quality information simultaneously (S122).

[0050] Figs. 13 and 14 are conceptual illustration of the principle of the shown embodiment. UL DPCH and UL HS-DPCCH may be set in code multiplexing or in time sharing. Fig. 13 shows a condition where the mobile station transmits the quality information at a predetermined interval starting from a predetermined timing, and the quality information and the Feedback Indicator are transmitted simultaneously. In the shown embodiment, immediately after reception of the quality information by the base station, the packet data is continuously transmitted to the mobile station. However, it is also possible to provide a given delay for the transmission initiation timing, and to transmit the packet data in discontinuous manner.

[0051] Fig. 14 shows a manner of stopping transmission of the quality information after completion of all packet data by the mobile station. Since transmission of the quality information is stopped, transmission of the Feedback Indicator to be transmitted simultaneously with the quality information is also stopped. In the shown embodiment, while transmission of the quality information is stopped by releasing the UL HS-DPCCH, it is also possible to realize stopping of transmission of the quality

information by making transmission power small.

[0052] Fig. 15 shows respective formats of UL HS-DPCCH for transmitting the quality information and UL DPCCH for transmitting Feedback Indicator. UL-DPCCH is the same as the first embodiment of Fig. 7. DL DPCCH includes a pilot signal (individual), TFCI, a feedback information (FBI) and a transmission power control (TPC). In the shown embodiment, a part of a region of FBI is used as bit for Feedback Indicator. It is also possible to use UL common channel in place of UL DPCCH.

[0053] Next, discussion will be given for the fourth embodiment of the present invention. The fourth embodiment is established by combination of the processes of the first embodiment and the third embodiment. Namely, the base station issues the preliminary notice of data transmission and end notice of data transmission to the mobile station. Upon reporting of the quality information, the mobile station transmits the Feedback Indicator, simultaneously

[0054] In the shown embodiment, after receiving preliminary notice of data transmission transmitted by the base station, the mobile station transmits the quality information. On the other hand, after reception of the end notice of data transmission, the mobile station terminates transmission of the quality information. Thus, battery operation period of the mobile station can be expanded. Furthermore, upon stopping transmission of the quality information, uplink quality control channel is released, only a part of mobile stations among a large number of mobile stations set UL HS-DPCCH to reduce uplink interference power and to increase capacity of the uplink radio channel. In addition, since Feedback Indicator is transmitted upon transmitting the quality information, the base station can certainly receive the quality information.

[0055] Operation of the base station in the shown embodiment is the same as that of the first embodiment illustrated in Fig. 3. Fig. 16 is a flowchart showing operation of the mobile station of the shown embodiment, in which the process in step S121 of flowchart of the third embodiment shown in Fig. 12 is modified to step S131, and the process in step S110 of flowchart of the second embodiment shown in Fig. 12 is modified to step S132. Namely, after setting channel (S102), the mobile station makes judgment whether the preliminary notice of data transmission is received from the base station (S131). If received, the mobile station transmits Feedback Indicator and the quality information simultaneously (S122). Next, judgment is made whether the end notice of data transmission is received from the base station (S132), if received, judgment is made whether new packet data is demanded or not (S106).

[0056] Figs. 17 and 18 show conceptual illustration of the principle of the shown embodiment. Fig. 17 shows the condition where the quality information is transmitted at the predetermined interval from the predetermined timing after reception of the preliminary notice of

data transmission by the mobile station, and the quality information and Feedback Indicator are transmitted simultaneously. Fig. 18 shows the manner of stopping transmission of the quality information after reception of the end notice of data transmission by the mobile station. Transmission of the quality information is stopped, then transmission of the Feedback Indicator which is transmitted simultaneously with the quality information, is also stopped. In the shown embodiment, UL HS-DPCCH is released to stop quality information. However, it is also possible to stop the transmission of the quality information by making the transmission power smaller.

[0057] Next, discussion will be given for the fifth embodiment of the present invention. In the former four embodiments, the base station issues the end notice of data transmission at step S4 of the flowchart shown in Fig. 3. However, the fifth embodiment does not issue the end notice. In the fifth embodiment, the mobile station stops reporting of the quality information when the mobile station receives the final packet data.

[0058] In the shown embodiment, after receiving the preliminary notice of data transmission transmitted by the base station, the mobile station transmits the quality information. Also, after receiving the final packet data, the mobile station stops transmission of the quality information. Thus, battery operation period of the mobile station can be expanded. Furthermore, upon stopping transmission of the quality information, uplink quality control channel is released, only a part of mobile stations among a large number of mobile stations set UL HS-DPCCH to reduce uplink interference power and to increase capacity of the uplink radio channel. Furthermore, since Feedback Indicator is transmitted upon transmission of the quality information, the base station can certainly receive the quality information. It should be noted that the operation of the base station in the shown embodiment is the same as that shown in the flowchart of the second embodiment shown in Fig. 8.

[0059] Fig. 19 shows a flowchart, in which step S132 of the flowchart of Fig. 16 is modified to step S141. Namely, after transmitting the Feedback Indicator and the quality information to the base station simultaneously (S122), judgment is made whether the final packet data is received or not (S141). If the final packet data is received, judgment is made whether new packet data is not demanded (S106).

[0060] Fig. 20 is a conceptual illustration showing the principle of the shown embodiment. Fig. 20 shows a manner for stopping transmission of quality information after completion of reception of all packet data in the mobile station, and a manner for stopping transmission of the Feedback Indicator simultaneously with stopping transmission of the quality information. In the shown embodiment, while transmission of the quality information is stopped by releasing the UL HS-DPCCH, it is also possible to realize stopping of transmission of the quality information by making transmission power smaller.

[0061] Next, the sixth embodiment of the present invention will be discussed. The base station transmits a threshold value for making the mobile station transmit the quality information to the mobile station as the control information. The mobile station measures own quality information. When the reception quality is in excess of the threshold value, the quality information is reported. At this time, the Feedback Indicator is also transmitted simultaneously with the quality information.

[0062] In the shown embodiment, the mobile station transmits the quality information at a predetermined timing after setting channel with the base station. Also, after receiving the final packet data, the mobile station stops transmission of the quality information. Thus, battery operation period of the mobile station can be expanded. Furthermore, upon stopping transmission of the quality information, uplink quality control channel is released, only a part of mobile stations among a large number of mobile stations set UL HS-DPCCH to reduce uplink interference power and to increase capacity of the uplink radio channel. Furthermore, since the Feedback Indicator is transmitted upon transmission of the quality information, the base station can certainly receive the quality information. Furthermore, since the quality information is reported when the reception quality of the mobile station is greater than or equal to the threshold value, high speed packet transmission service with low error ratio can be performed.

[0063] Fig. 21 is a flowchart showing operation of the base station. In the base station, processing operation for setting the threshold value for making the mobile station transmit the quality information is realized. Fig. 22 is a flowchart showing operation of the mobile station. When the reception quality becomes greater than or equal to the threshold value based on the threshold value received from the base station, processing operation of the mobile station for transmitting the quality information to the base station is realized.

[0064] Referring to Fig. 21, the base station sets the threshold value P of the reception quality, an offset ΔP for adjusting the threshold value and a threshold value N of number of mobile stations as initial values to transmit to respective mobile stations (S201). Next, the quality information is received from respective mobile stations (S202). Then, judgment is made whether the number of mobile stations which report the reception quality, is greater than N (S203). If the number of the responded mobile stations is greater than N , the quality information of the mobile station having N th reception quality from the best quality is set as new threshold value P for transmitting the increased threshold value P to respective station so that number of the responded mobile station becomes N . (S204). On the other hand, if number of the responded mobile stations is less than N , $P - \Delta P$ is set as new threshold value P to transmit to respective mobile stations (S205).

[0065] Thus, since the number of the mobile stations which report the quality information to the base station

is controlled to be the predetermined value N , only a part of mobile stations having high reception quality among a large number of mobile stations set UL HS-DPCCH. Lowering of uplink interference wave power becomes possible to increase capacity of the uplink radio channel.

[0066] Fig. 22 is a flowchart established by modifying step S122 of the flowchart of the third embodiment shown in Fig. 12 to steps S151 and S152. Namely, when establishing setting of the channel with the base station, the mobile stations wait for expiration of the predetermined period (S121). Then, the reception quality is measured (S151). Then, judgment is made whether the reception quality is higher than the threshold value P notified from the base station (S152). If the reception quality is higher than or equal to the threshold value P , the Feedback Indicator and the quality information are transmitted simultaneously (S122).

[0067] Fig. 23 is a conceptual illustration showing the principle of the shown embodiment. Fig. 23 shows a manner wherein the mobile station compares the reception quality and the threshold value P to transmit the quality information and the Feedback Indicator to the base station at a given interval when the quality information is greater than or equal to the threshold value. As shown in Fig. 23, initially, since the reception quality is lower than the threshold value P , the quality information is not reported. After elevating the reception quality to be higher than or equal to the threshold value P , the reception quality is reported from the mobile station to the base station.

[0068] In the shown embodiment, the threshold value is determined as illustrated by the flowchart of Fig. 21. However, the threshold value may be determined in various other ways. For example, the threshold value may be determined by the base station control unit. Alternatively, a given value is subtracted from an average value of the reception equality of all mobile stations responding to the base station to set as the threshold value.

[0069] Fig. 24 shows respective formats of DL DPCH transmitting the threshold value information, HS-DPCCH transmitting the quality information and UL DPCCH transmitting the Feedback Indicator. In the shown embodiment of the present invention, a part of the region of TFCI is used for transmitting the threshold value information P . The common channel may be used instead of DL DPCH. UL HS-DPCCH and UL DPCCH are the same as the third embodiment shown in Fig. 15.

[0070] Next, the seventh embodiment of the present invention will be discussed. In the shown embodiment, the base station transmits command information (hereinafter referred to as Request Indicator) demanding report of quality information of data to the mobile station. When the mobile station continuously receives the Request Indicator in ON state for a predetermined number of times (hereinafter Non times), the quality information is transmitted to the base station by UL HS-DPCCH. On the other hand, when the mobile station continuously receives the Request Indicator in OFF state for a prede-

terminated number of times (hereinafter Noff times), transmission of the quality information is stopped.

[0071] In the shown embodiment, since the mobile station receives the Request Indicators transmitted from the base station to judge start and stop of transmission of the quality information, the mobile station may transmit the quality information only as required by the base station. Therefore, battery operation period of the mobile station can be expanded. Furthermore, upon stopping transmission of the quality information, uplink quality control channel is released, only a part of mobile stations among a large number of mobile stations set UL HS-DPCCH to reduce uplink interference power and to increase capacity of the uplink radio channel.

[0072] In the shown embodiment, number of times of Non and Noff are set by the base station control unit which controls the base stations to be notified to the mobile stations from the base station upon setting DL DPCH. In the shown embodiment, it is set Non = 1 time and Noff = 5 times. By setting Non < Noff, the mobile station can quickly report the quality information when the base station requires the quality information. Even when the base station transmits the Request Indication in ON state but the mobile station receives the Request Indicator in OFF state by low receiving condition, probability of causing reception failure sequentially is low to successfully prevent erroneous stopping of reporting of the quality information.

[0073] By an operation shown in Fig. 25, the processing operation of the base station for setting ON and OFF of the Request Indicator can be realized. On the other hand, by an operation shown in Fig. 26, the processing operation of the mobile station for starting and stopping transmission of the quality information on the basis of the Request Indicator received from the base station can be realized.

[0074] Referring to Fig. 25, as initial state, the base station sets the Request Indicator OFF (S11). Next, the base station makes judgment whether the packet data demanded by the mobile station arrives at its own station or not (S11). If the packet data arrives the packet schedule for transmitting data to the mobile station is checked (S13). On the basis of the result of checking, check is performed whether the packet data is scheduled to transmit to the mobile station within the predetermined period (S14). If the transmission is scheduled, the Request Indicator is set ON (S15). If the transmission is not scheduled, the Request Indicator is set OFF (S16). That is, the Request Indicator is set ON/OFF according to presence or no-presence of the schedule of the transmission. After setting the Request Indicator, judgment is made whether the packet data to be transmitted is the final packet data to be transmitted to the mobile station (S17). If the packet data is the final packet data, the Request Indicator to be transmitted to the mobile station is set OFF (S18). That is, the Request Indicator is set OFF according to the transmission of the final packet data.

[0075] Fig. 26 shows a process, in which step S103 of the process shown in the flowchart of the second embodiment shown in Fig. 9 is modified to steps S161 and 162. Namely, after setting the channel (S102), the mobile station makes judgment whether the Request Indicator is received in ON state (S161). If ON, the quality information is transmitted to the base station (S104). If OFF, judgment is made whether Request Indicator in OFF state is sequentially received for five times or more (S162). If less than five times, the quality information is transmitted to the base station (S104).

[0076] Fig. 27 is a conceptual illustration showing a principle of the shown embodiment. Fig. 27 shows the manner for transmitting the quality information to the base station at the predetermined interval when the Request Indicator in ON state is received and the Request Indicator in OFF state is received less than five times. Moreover, when the Request Indicator in OFF state is received for five times or more, manner for stopping transmission of quality information is shown in Fig. 27. Fig. 28 shows respective formats of DL DPCH transmitting the Request Indicator and UL HS-DPCCH transmitting the quality information. In the shown embodiment of the present invention, a part of a region of TFCI is used as a bit for preliminary notice of data transmission. A DL common channel may also be used in replace of DL DPCH. UL HS-DPCCH is the same as the first embodiment shown in Fig. 7.

[0077] Next, discussion will be given for the eighth embodiment of the present invention. The shown embodiment transmits the Feedback Indicator simultaneously with transmission of the quality information in the seventh embodiment. In the shown embodiment, the mobile station receives the Request Indicators transmitted by the base station to judge start and stop of transmission of the quality information. Therefore, the mobile station may transmit the quality information only when the base station requires. As the result, battery operation period of the mobile station can be expanded. Furthermore, upon stopping transmission of the quality information, uplink quality control channel is released, only a part of mobile stations among a large number of mobile stations set UL HS-DPCCH to reduce uplink interference power and to increase capacity of the uplink radio channel. Furthermore, since the Feedback Indicator is transmitted upon transmission of the quality information, the base station can certainly receive the quality information. It should be noted that operation of the base station is the same as the process of the preceding seventh embodiment illustrated in the flowchart of Fig. 25.

[0078] The process shown in Fig. 29 modifies the process at step S104 in Fig. 29 to step S171. Namely, the Feedback Indicator and the transmission quality information are transmitted simultaneously (S171). Fig. 30 is a conceptual illustration showing the principle of the shown embodiment. In Fig. 30, UL DPCH is added to the timing chart shown in Fig. 27. When the mobile station transmits the quality information, the Feedback

Indicator is transmitted simultaneously.

[0079] It should be noted that process of flowcharts showing operation of the base station and the mobile station in respective of the foregoing embodiments may be preliminarily stored in a storage medium as a procedure. Then, the procedure stored in the storage medium may be loaded on a computer for execution.

[0080] As set forth above, with the present invention, the following effects can be obtained. The first effect is to expand operation period of the battery for smaller power consumption in the mobile station. The reason is that stop control of transmission of the quality information to the base station is performed in the mobile station, and, in conjunction therewith, measurement of the reception quality of the pilot signal can be stopped.

[0081] The second effect is to reduce interference wave power of the uplink (UL) to increase capacity of the uplink radio channel. The reason is that transmission period ratio of UL HS-DPCCH can be reduced significantly.

[0082] The third effect is that the base station can receive the quality information from the mobile station at a timing, at which the quality information is needed. The reason is that UL HS-DPCCH is set only as needed in order to make the mobile station transmit the quality information.

[0083] Although the present invention has been illustrated and described with respect to exemplary embodiment thereof, it should be understood by those skilled in the art that the foregoing and various other changes, omission and additions may be made therein and thereto, without departing from the spirit and scope of the present invention. Therefore, the present invention should not be understood as limited to the specific embodiment set out above but to include all possible embodiments which can be embodied within a scope encompassed and equivalent thereof with respect to the feature set out in the appended claims.

Claims

1. A mobile communication system comprising:

a base station; and
a mobile station,
said base station transmitting a downlink signal;
said mobile station setting an uplink control channel with said base station, measuring a reception quality of said downlink signal, transmitting a quality information depending upon said reception quality using said uplink control channel,
said base station performing transmission control of data to said mobile station using said quality information,
said base station including means for transmit-

ting data transmission notice to said mobile station by setting a downlink control channel with said mobile station, and
said mobile station including means for starting transmission of said quality information to said base station at a given interval in response to said data transmission notice while said uplink control channel is set.

2. A mobile communication system as set forth in claim 1, wherein said mobile station includes means for stopping transmission of said quality information in response to a data transmission notice from said base station while said uplink control channel is set.

3. A mobile communication system comprising:

a base station; and
a mobile station,
said base station transmitting a downlink signal;
said mobile station setting an uplink control channel with said base station, measuring a reception quality of said downlink signal, transmitting a quality information depending upon said reception quality using said uplink control channel,
said base station performing transmission control of data to said mobile station using said quality information,
said mobile station including means for transmitting said quality information at a given interval in response to reception of data, and means for transmitting a indication information indicating on transmission of said quality information using said uplink control channel.

4. A mobile communication system as set forth in claim 1, wherein said mobile station includes means for stopping transmission of said quality information in response to completion of data reception.

5. A mobile communication system comprising:

a base station; and
a mobile station,
said base station transmitting a downlink signal;
said mobile station setting an uplink control channel with said base station, measuring a reception quality of said downlink signal, transmitting a quality information depending upon said reception quality using said uplink control channel,
said base station performing transmission control of data to said mobile station using said quality information,
said base station including means for notifying

a threshold value to said mobile station by setting downlink control channel, and said mobile station including means for controlling transmission of said quality information to said base station at a given interval in response to a result of comparison of said threshold value and said reception quality.

6. A mobile communication system comprising:

a base station; and
a mobile station,
said base station transmitting a downlink signal;
said mobile station setting an uplink control channel with said base station, measuring a reception quality of said downlink signal, transmitting a quality information depending upon said reception quality using said uplink control channel,
said base station performing transmission control of data to said mobile station using said quality information,
said base station including means for setting a downlink control channel with said mobile station and transmitting a command information indicative of a demand of reporting of said quality information to said mobile station in response to data transmission to said mobile station, and
said mobile station including means for transmitting said quality information to said base station in response to said command information.

7. A mobile communication system as set forth in claim 6, wherein said base station includes means for transmitting a command information indicative of a demand for stopping reporting of said quality information to said mobile station in response to data transmission to said mobile station, and
said mobile station includes means for stopping transmission of said quality information to said base station in response to said command.

8. A mobile communication system as set forth in claim 6, wherein said predetermined interval is variable.

9. A communication control method in a mobile communication system including a base station and a mobile station, said base station transmitting a downlink signal, said mobile station setting an uplink control channel with said base station, measuring a reception quality of said downlink signal, transmitting a quality information depending upon said reception quality using said uplink control channel, and said base station performing transmission control of data to said mobile station using said quality

information,

said communication control method comprising:

in said base station, step of transmitting data transmission notice to said mobile station by setting a downlink control channel with said mobile station, and
in said mobile station, step of starting transmission of said quality information to said base station at a given interval in response to said data transmission notice while said uplink control channel is set.

10. A communication control method in a mobile communication system as set forth in claim 9, which further comprises, in said mobile station, step of stopping the transmitting of said quality information in response to a data transmission notice from said base station while said uplink control channel is set.

11. A communication control method in a mobile communication system including a base station and a mobile station, said base station transmitting a downlink signal, said mobile station setting an uplink control channel with said base station, measuring a reception quality of said downlink signal, transmitting a quality information depending upon said reception quality using said uplink control channel, and said base station performing transmission control of data to said mobile station using said quality information,

said communication control method comprising:

in said mobile station, step of transmitting said quality information at a given interval in response to reception of data, and step of transmitting a indication information indicating on transmission of said quality information using said uplink control channel.

12. A communication control method in a mobile communication system as set forth in claim 11, which further comprises, in said mobile station, step of stopping transmission of said quality information in response to completion of data reception.

13. A communication control method in a mobile communication system including a base station and a mobile station, said base station transmitting a downlink signal, said mobile station setting an uplink control channel with said base station, measuring a reception quality of said downlink signal, transmitting a quality information depending upon said reception quality using said uplink control channel, and said base station performing transmission control of data to said mobile station using said quality

information,
said communication control method comprising:

in said base station, step of notifying a threshold value to said mobile station by setting downlink control channel, and
in said mobile station, step of controlling transmission of said quality information to said base station at a given interval in response to a result of comparison of said threshold value and said reception quality.

14. A communication control method in a mobile communication system including a base station and a mobile station, said base station transmitting a downlink signal, said mobile station setting an uplink control channel with said base station, measuring a reception quality of said downlink signal, transmitting a quality information depending upon said reception quality using said uplink control channel, and said base station performing transmission control of data to said mobile station using said quality information,

said communication control method comprising:

in said base station, step of setting a downlink control channel with said mobile station and transmitting a command information indicative of a demand of reporting of said quality information to said mobile station in response to data transmission to said mobile station, and
in said mobile station, step of transmitting said quality information to said base station at a given interval in response to said command information.

15. A communication control method in a mobile communication system as set forth in claim 14, which further comprises:

in said base station, step of transmitting a command information indicative of a demand for stopping reporting of said quality information to said mobile station in response to data transmission to said mobile station, and
in said mobile station, step of stopping transmission of said quality information to said base station in response to said command.

16. A communication control method in a mobile communication system as set forth in claim 14, wherein said predetermined interval is variable.

17. A mobile station in a mobile communication system including a base station and a mobile station, said base station transmitting a downlink signal, said

mobile station setting an uplink control channel with said base station, measuring a reception quality of said downlink signal, transmitting a quality information depending upon said reception quality using said uplink control channel, said base station performing transmission control of data to said mobile station using said quality information,
said mobile station comprising:

means for setting a downlink control channel with said base station and receiving a data transmission notice from said base station; and
means for starting transmission of said quality information to said base station at a given interval in response to said data transmission notice while said uplink control channel is set.

18. A mobile station in a mobile communication system as set forth in claim 17, which further comprises means for stopping transmission of said quality information in response to a data transmission notice from said base station while said uplink control channel is set.

19. A mobile station in a mobile communication system including a base station and a mobile station, said base station transmitting a downlink signal, said mobile station setting an uplink control channel with said base station, measuring a reception quality of said downlink signal, transmitting a quality information depending upon said reception quality using said uplink control channel, said base station performing transmission control of data to said mobile station using said quality information,
said mobile station comprising:

means for transmitting said quality information at a given interval in response to reception of data; and

means for transmitting a indication information indicating on transmission of said quality information using said uplink control channel.

20. A mobile station in a mobile communication system as set forth in claim 19, wherein said mobile station includes means for stopping transmission of said quality information in response to completion of data reception.

21. A mobile station in a mobile communication system including a base station and a mobile station, said base station transmitting a downlink signal, said mobile station setting an uplink control channel with said base station, measuring a reception quality of said downlink signal, transmitting a quality information depending upon said reception quality using said uplink control channel, said base station performing transmission control of data to said mobile

station using said quality information,
said mobile station comprising:

means for setting a downlink control channel
with said base station and receiving a threshold
value from said base station; and
means for controlling transmission of said qual-
ity information to said base station at a given
interval in response to a result of comparison
of said threshold value and said reception qual-
ity.

22. A mobile station in a mobile communication system
including a base station and a mobile station, said
base station transmitting a downlink signal, said
mobile station setting an uplink control channel with
said base station, measuring a reception quality of
said downlink signal, transmitting a quality informa-
tion depending upon said reception quality using
said uplink control channel, said base station per-
forming transmission control of data to said mobile
station using said quality information,
said mobile station comprising:

means for setting a downlink control channel
with said base station and receiving a com-
mand information indicative of a demand of re-
porting of said quality information in response
to data transmission; and
means for transmitting said quality information
to said base station in response to said com-
mand information.

23. A mobile station in a mobile communication system
as set forth in claim 22, which further comprises:

means for receiving a command information in-
dicative of a demand for stopping reporting of
said quality information from said base station
in response to data transmission; and
means for stopping transmission of said quality
information to said base station in response to
said command.

24. A mobile station in a mobile communication system
as set forth in claim 22, wherein said predetermined
interval is variable.

25. A base station in a mobile communication system
including a base station and a mobile station, said
base station transmitting a downlink signal, said
mobile station setting an uplink control channel with
said base station, measuring a reception quality of
said downlink signal, transmitting a quality informa-
tion depending upon said reception quality using
said uplink control channel, said base station per-
forming transmission control of data to said mobile
station using said quality information,

said base station comprising:

means for transmitting data transmission notice
to said mobile station by setting a downlink con-
trol channel with said mobile station, and
means for receiving said quality information
from said mobile station transmitting said qual-
ity information at a given interval in response to
said data transmission notice while said uplink
control channel is set.

26. A base station in a mobile communication system
including a base station and a mobile station, said
base station transmitting a downlink signal, said
mobile station setting an uplink control channel with
said base station, measuring a reception quality of
said downlink signal, transmitting a quality informa-
tion depending upon said reception quality using
said uplink control channel, said base station per-
forming transmission control of data to said mobile
station using said quality information,
said base station comprising:

means for receiving said quality information at
a given interval from said mobile station; and
means for receiving a indication information in-
dicating on transmission of said quality informa-
tion from said mobile station using said uplink
control channel.

27. A base station in a mobile communication system
including a base station and a mobile station, said
base station transmitting a downlink signal, said
mobile station setting an uplink control channel with
said base station, measuring a reception quality of
said downlink signal, transmitting a quality informa-
tion depending upon said reception quality using
said uplink control channel, said base station per-
forming transmission control of data to said mobile
station using said quality information,
said base station comprising:

means for notifying a threshold value to said
mobile station by setting downlink control chan-
nel; and
means for receiving said quality information
from said mobile station at a given interval in
response to a result of comparison of said
threshold value and said reception quality.

28. A base station in a mobile communication system
including a base station and a mobile station, said
base station transmitting a downlink signal, said
mobile station setting an uplink control channel with
said base station, measuring a reception quality of
said downlink signal, transmitting a quality informa-
tion depending upon said reception quality using
said uplink control channel, said base station per-

forming transmission control of data to said mobile station using said quality information, said base station comprising:

means for setting a downlink control channel 5
with said mobile station and transmitting a command information indicative of a demand of reporting of said quality information to said mobile station in response to data transmission to said mobile station; and 10
means for receiving said quality information from said mobile station.

29. A base station in a mobile communication system as set forth in claim 28, which further comprises 15
means for transmitting a command information indicative of a demand for stopping reporting of said quality information to said mobile station in response to data transmission to said mobile station. 20
30. A base station in a mobile communication system as set forth in claim 28, wherein said predetermined interval is variable. 25

30

35

40

45

50

55

60

FIG. 1

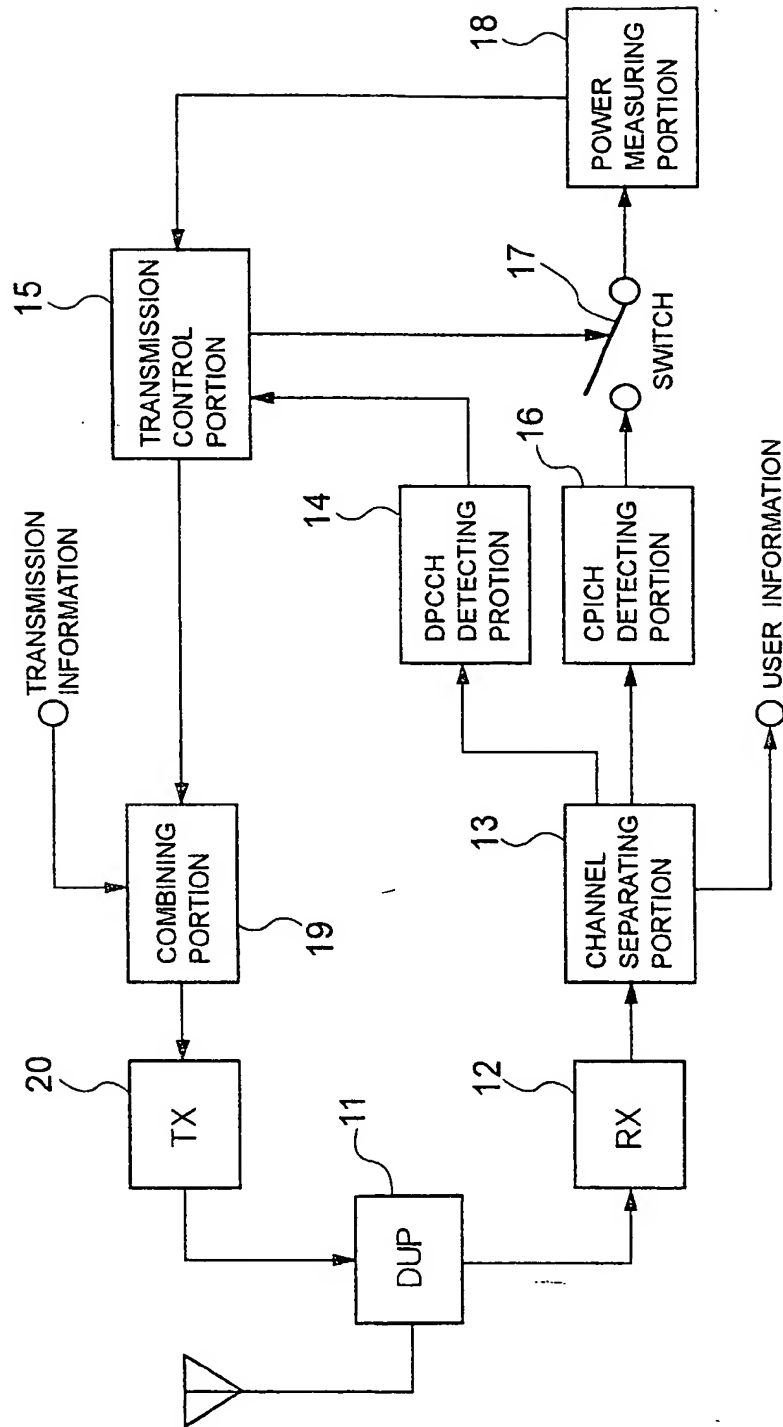


FIG. 2

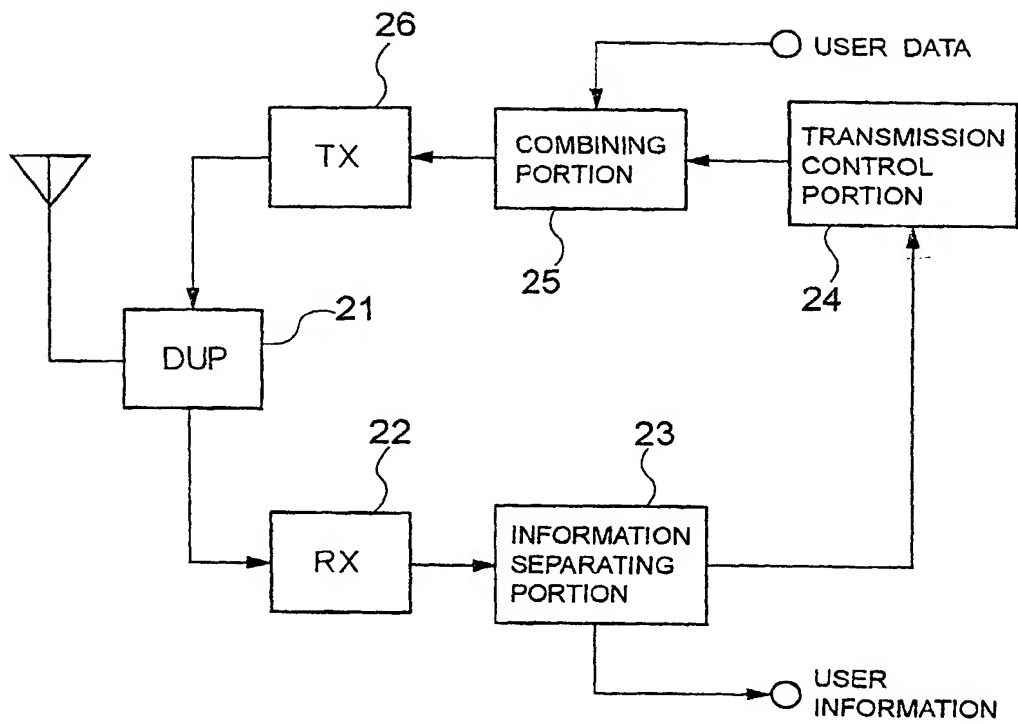


FIG. 3

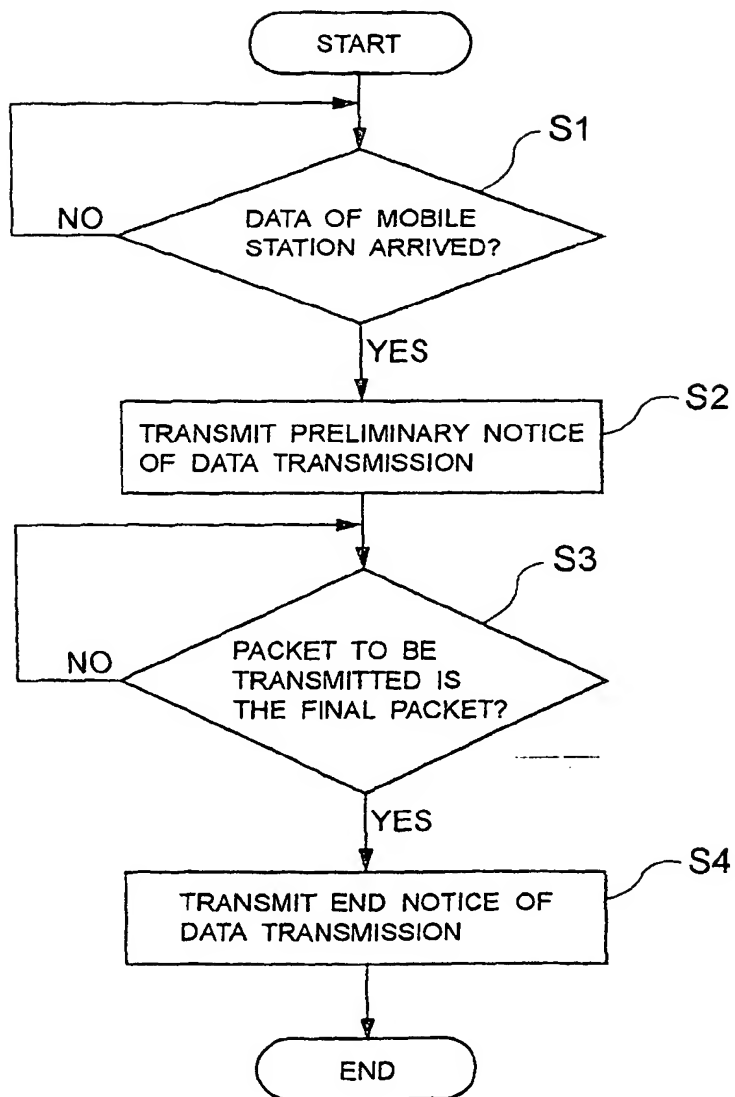


FIG.4

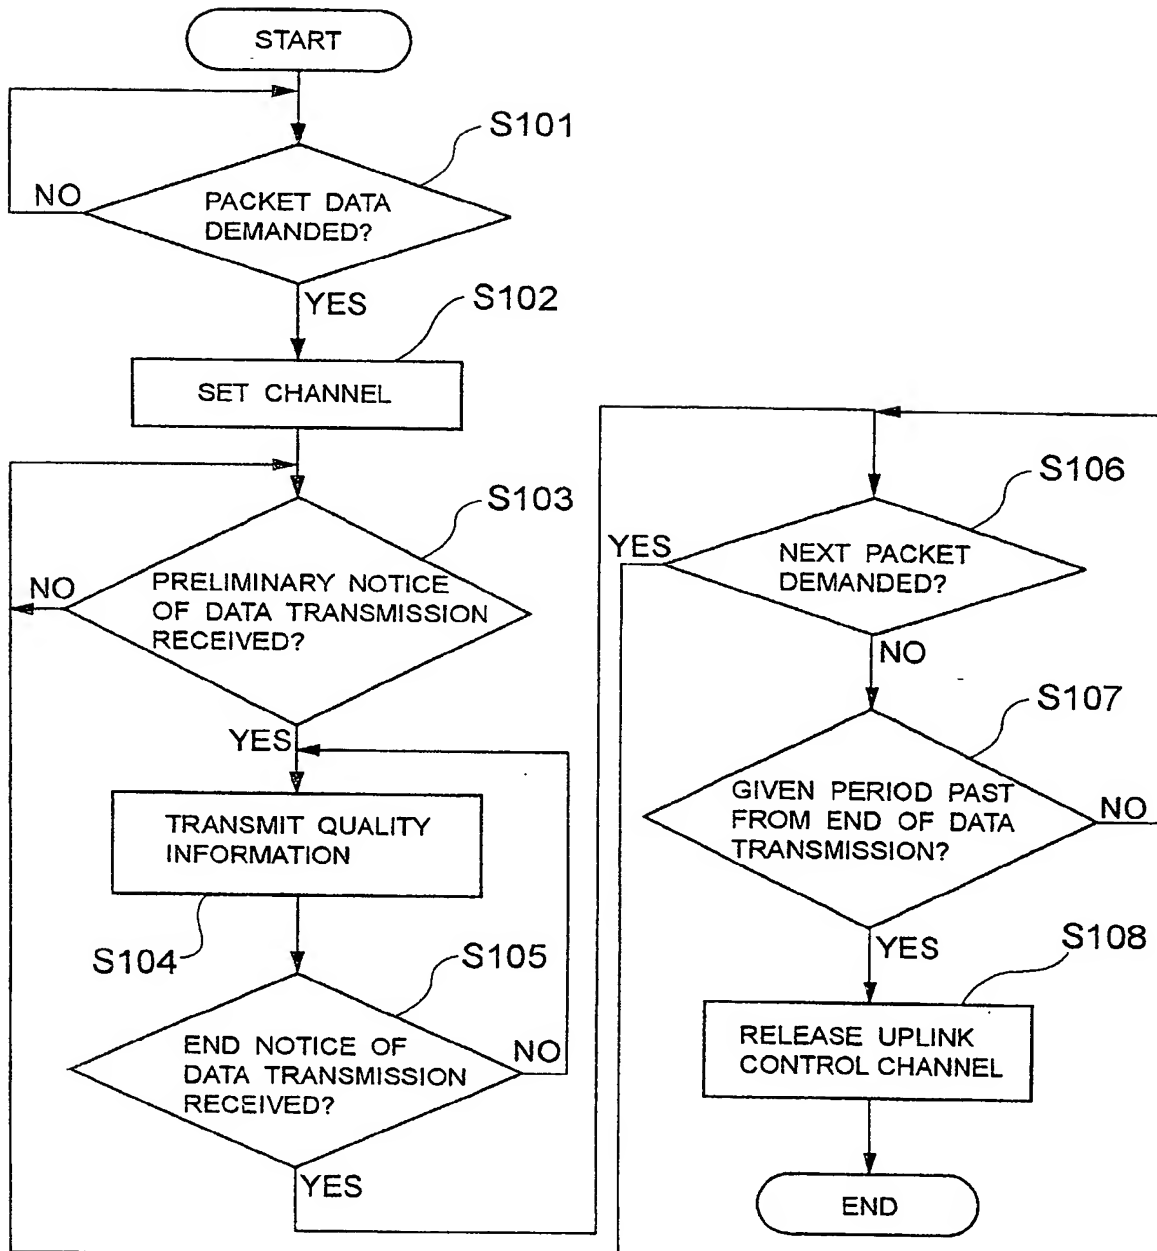


FIG. 5

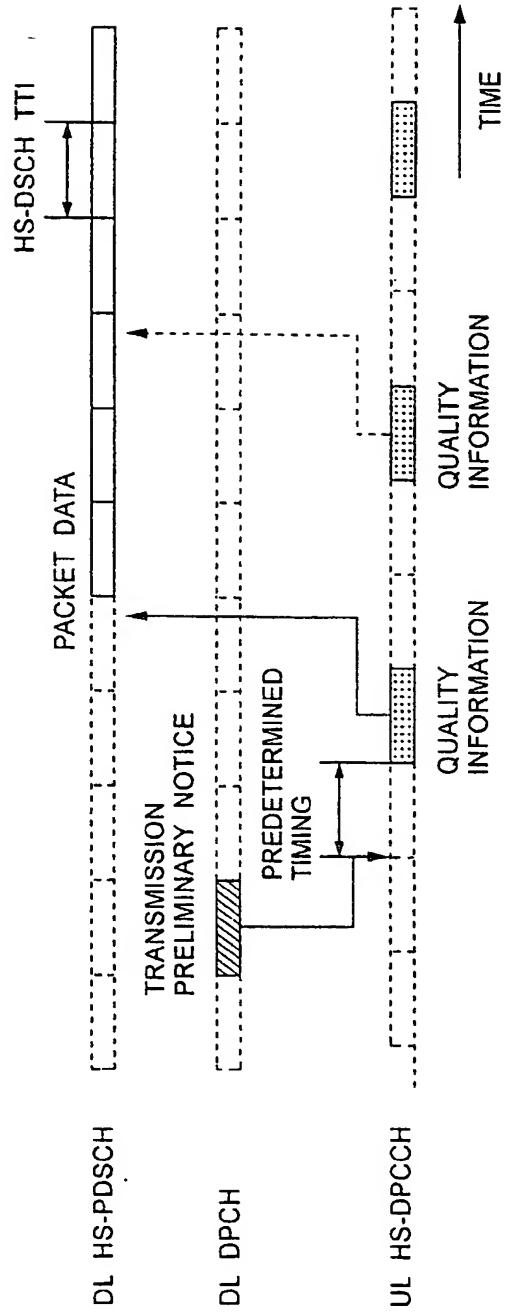


FIG. 6

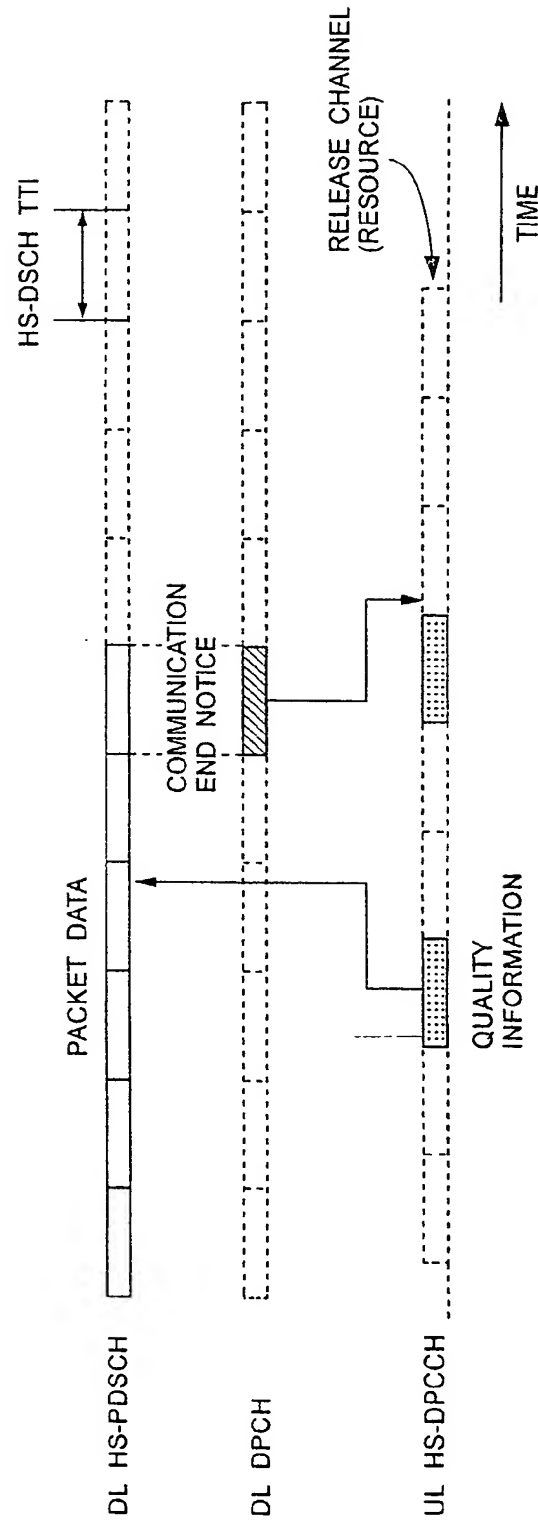


FIG. 7

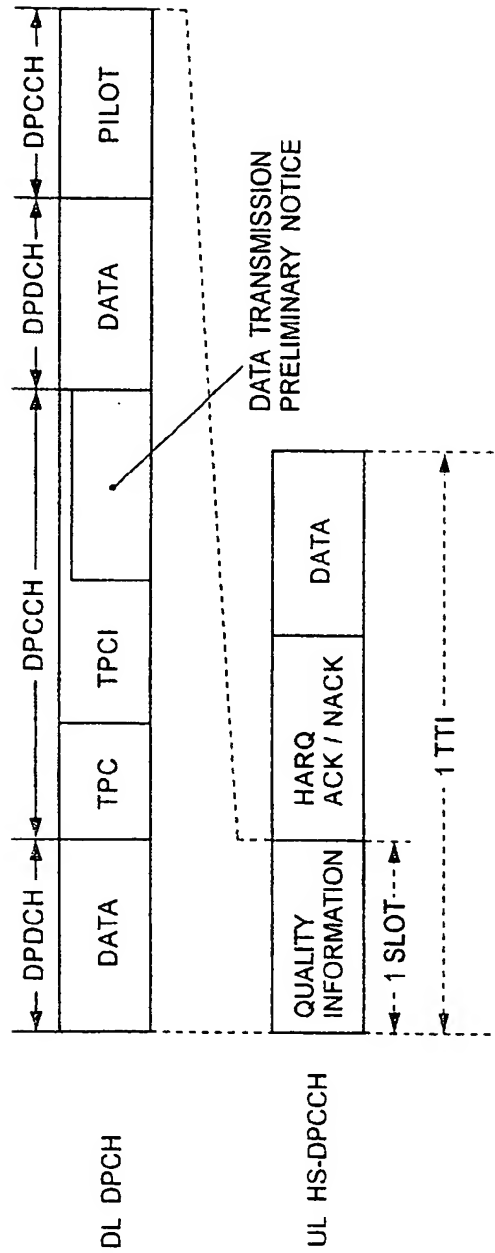


FIG. 8

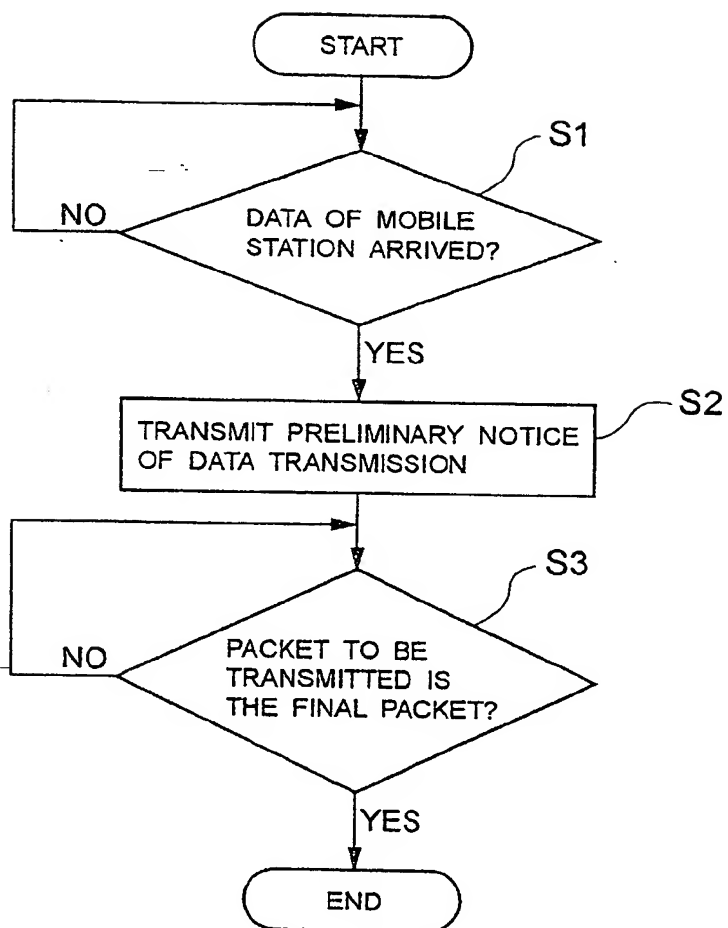


FIG.9

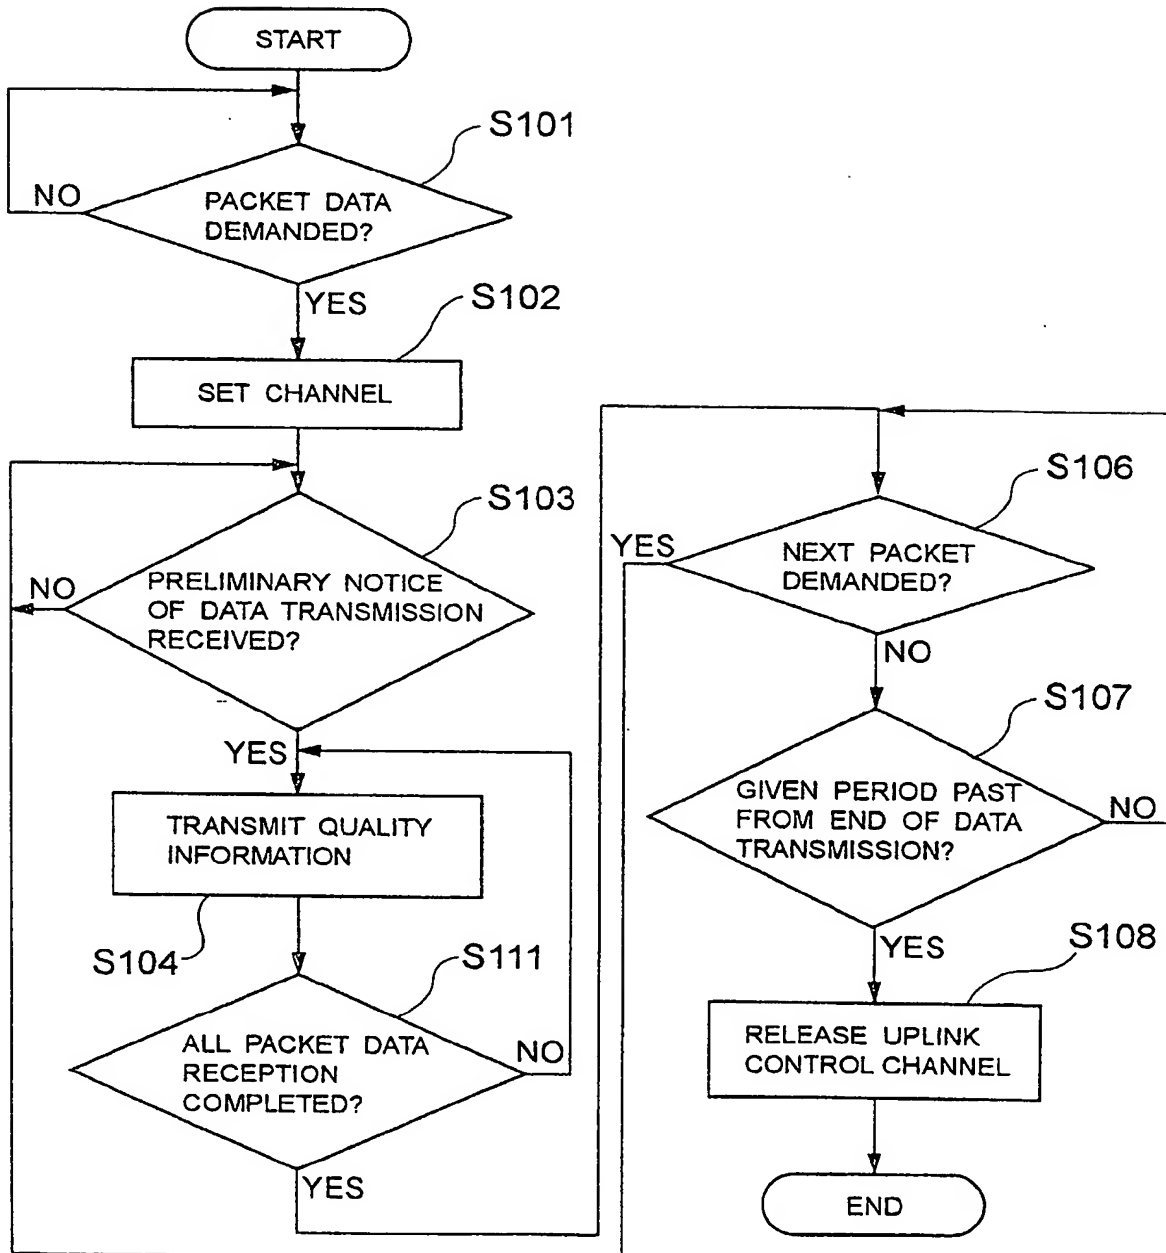


FIG. 10

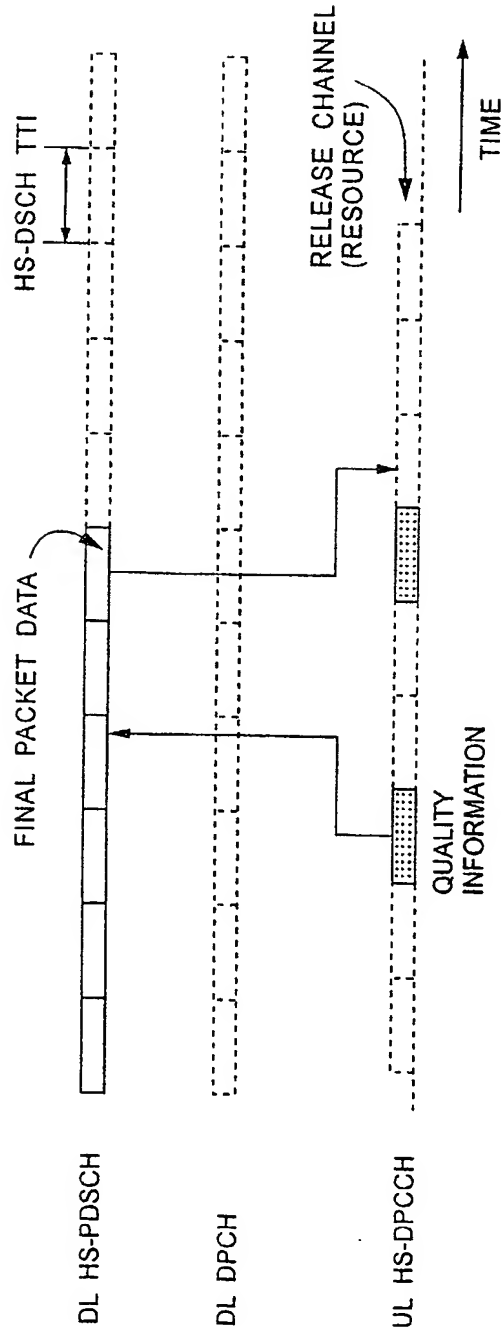


FIG.11

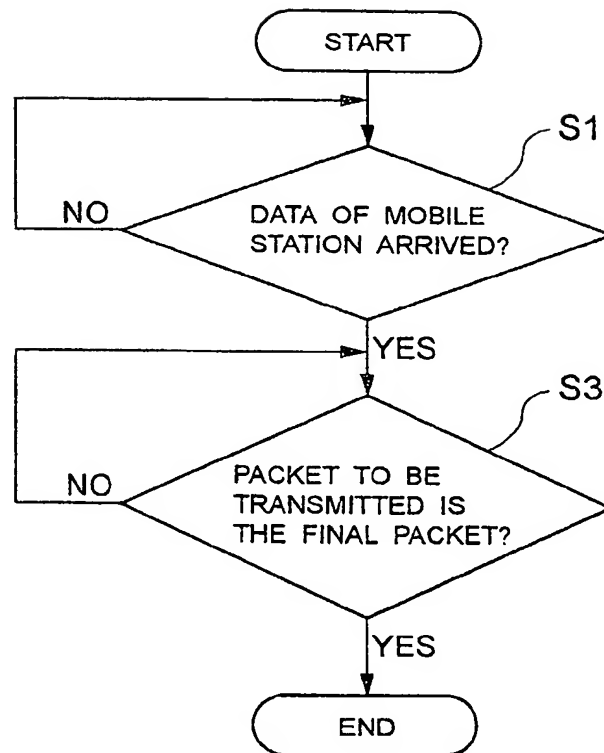


FIG.12

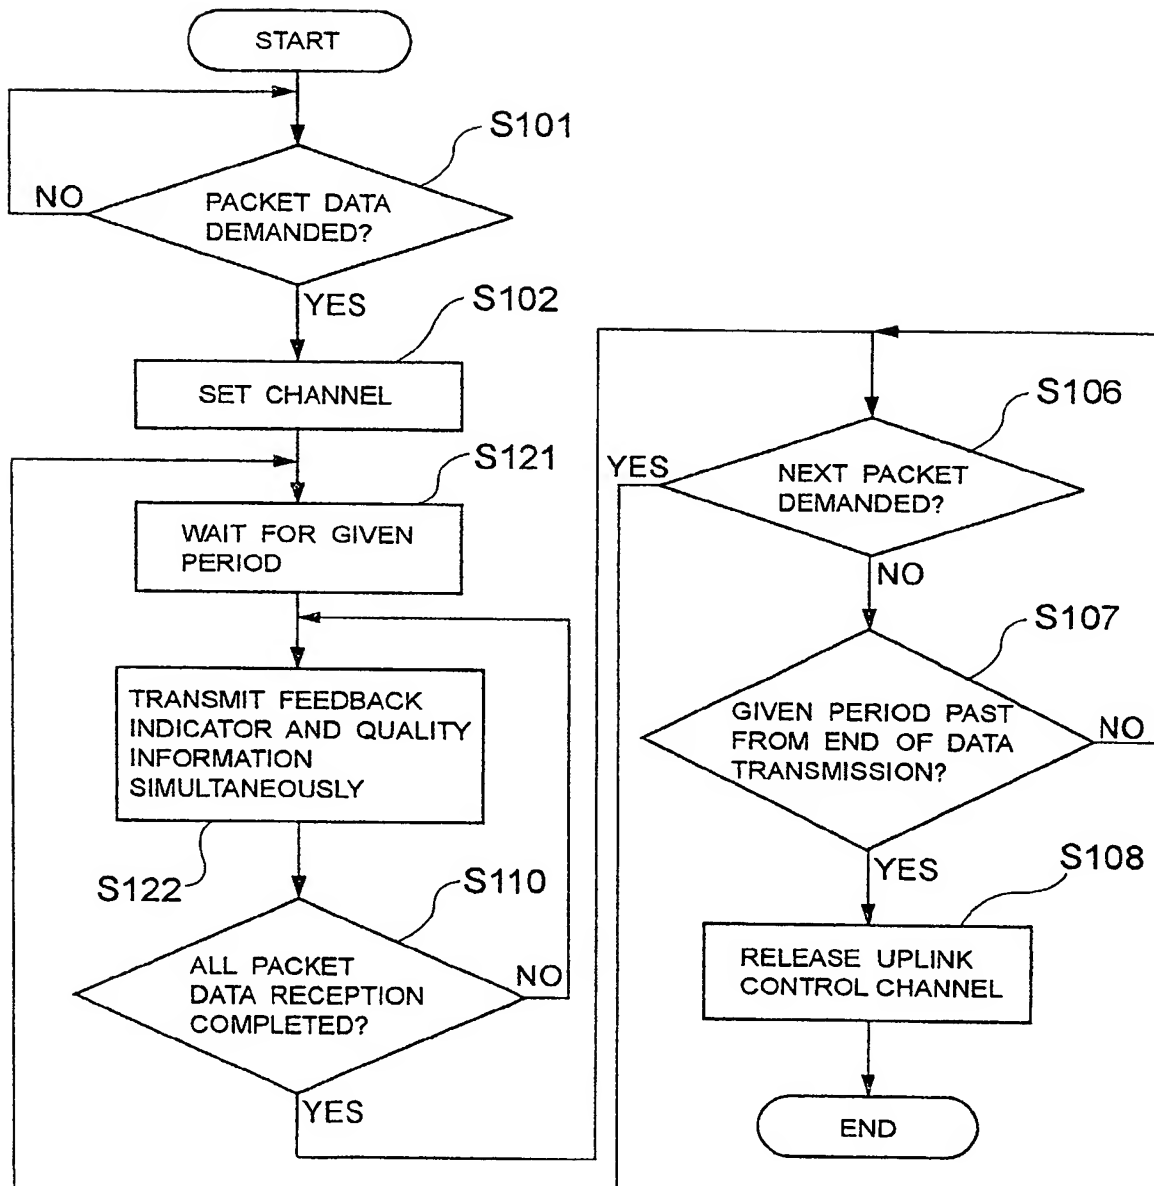


FIG. 13

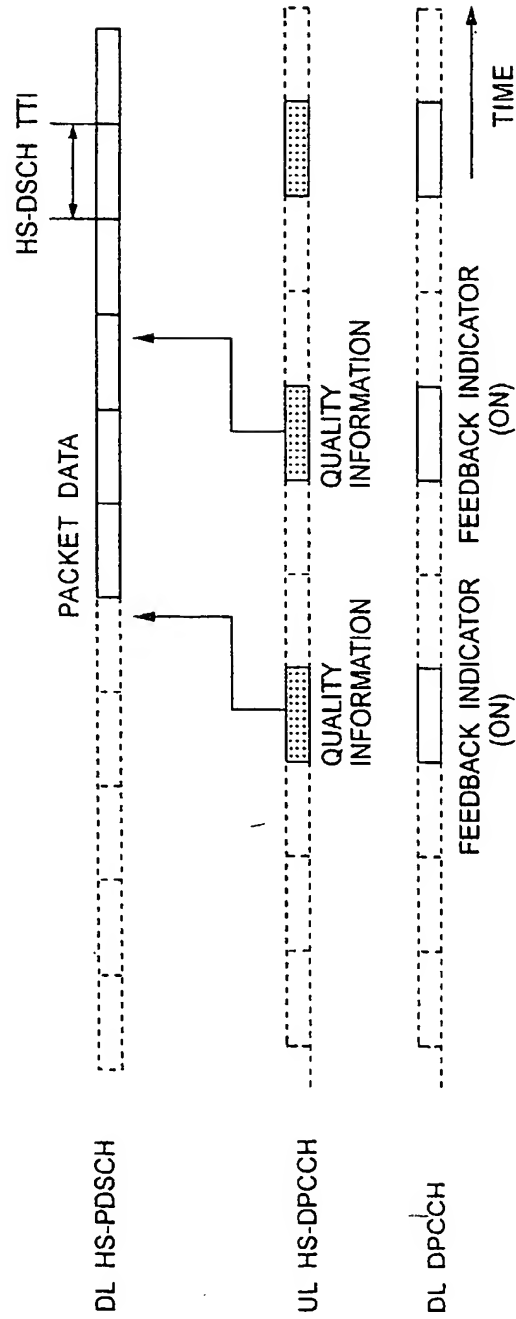


FIG. 14

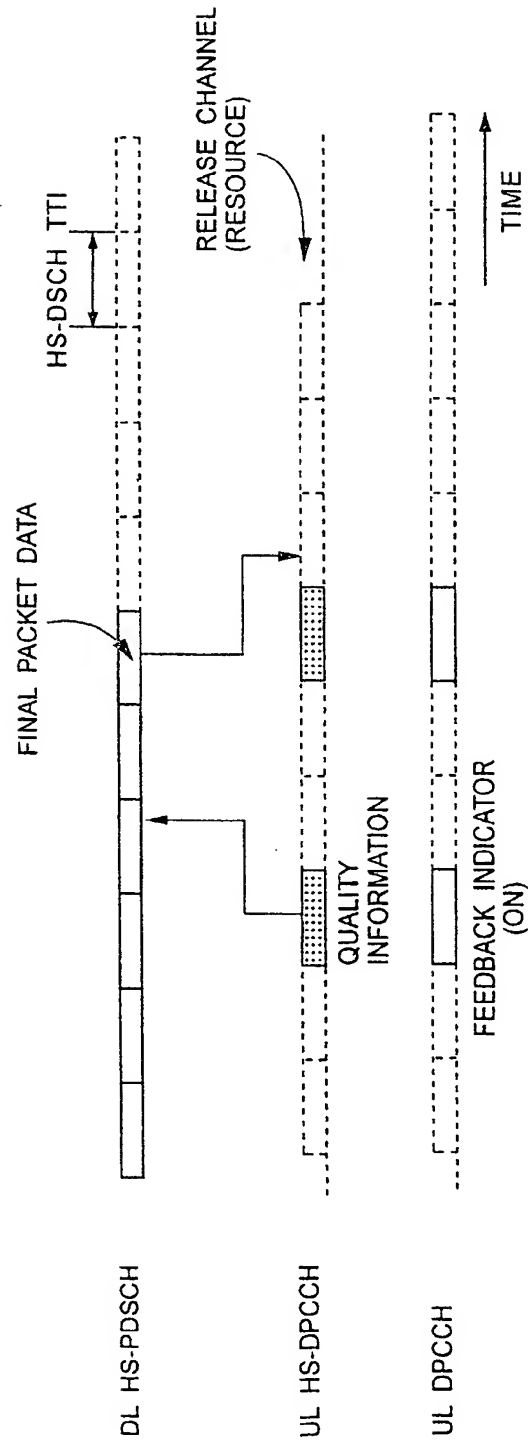


FIG. 15

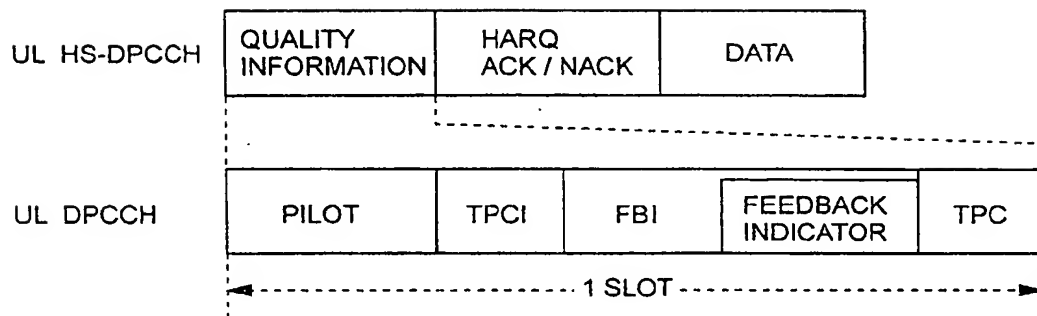


FIG.16

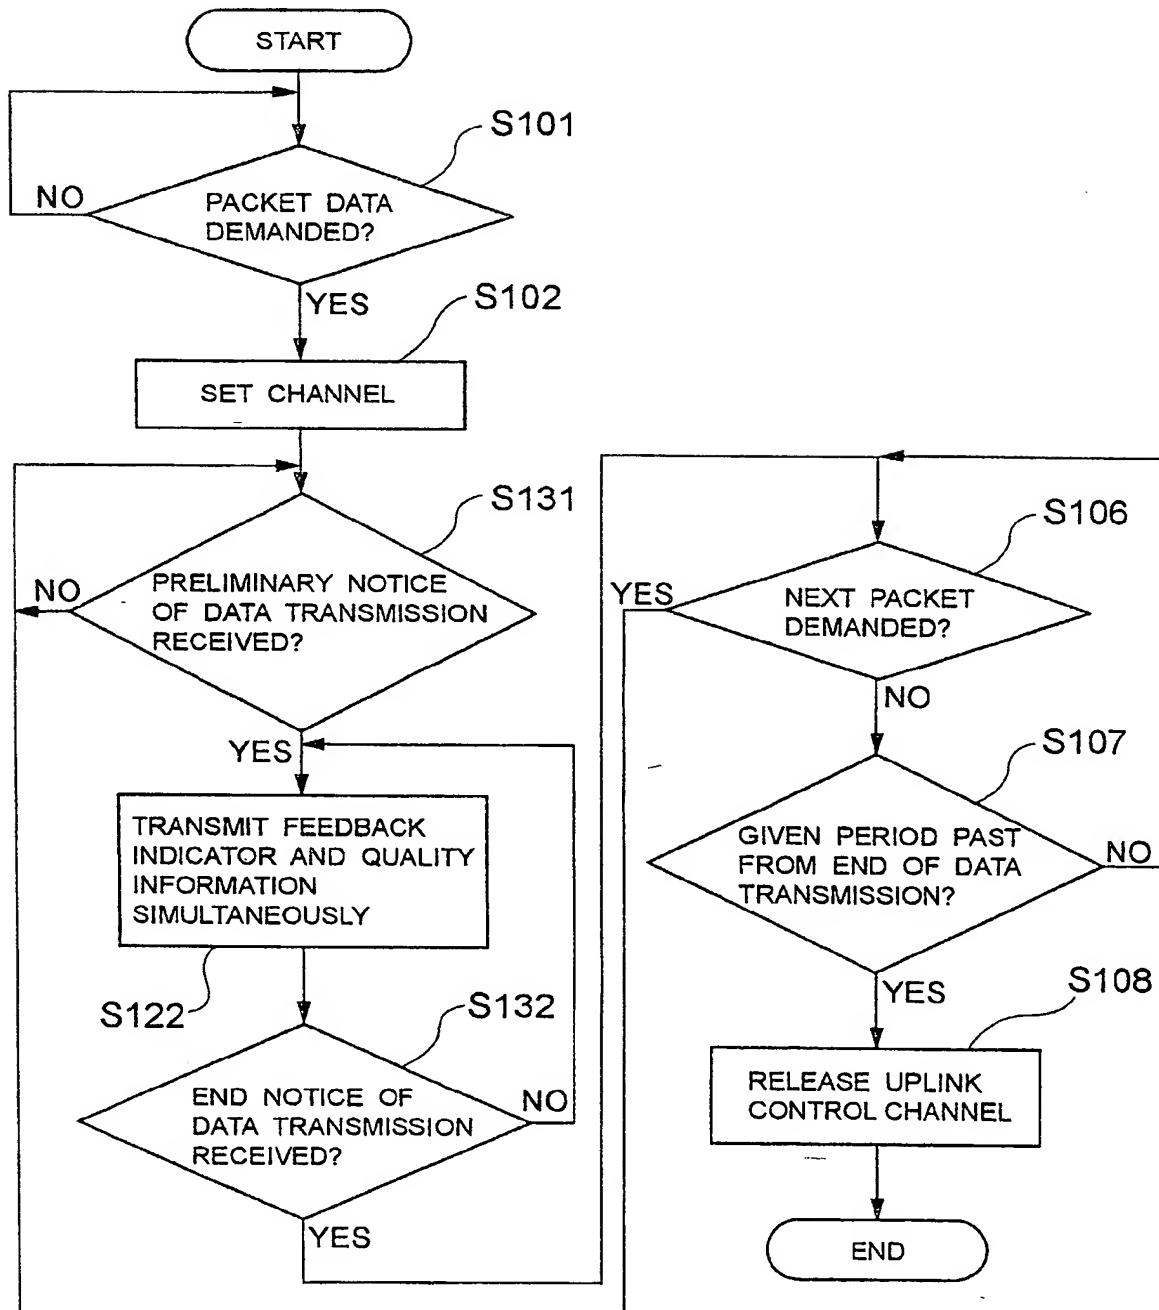


FIG. 17

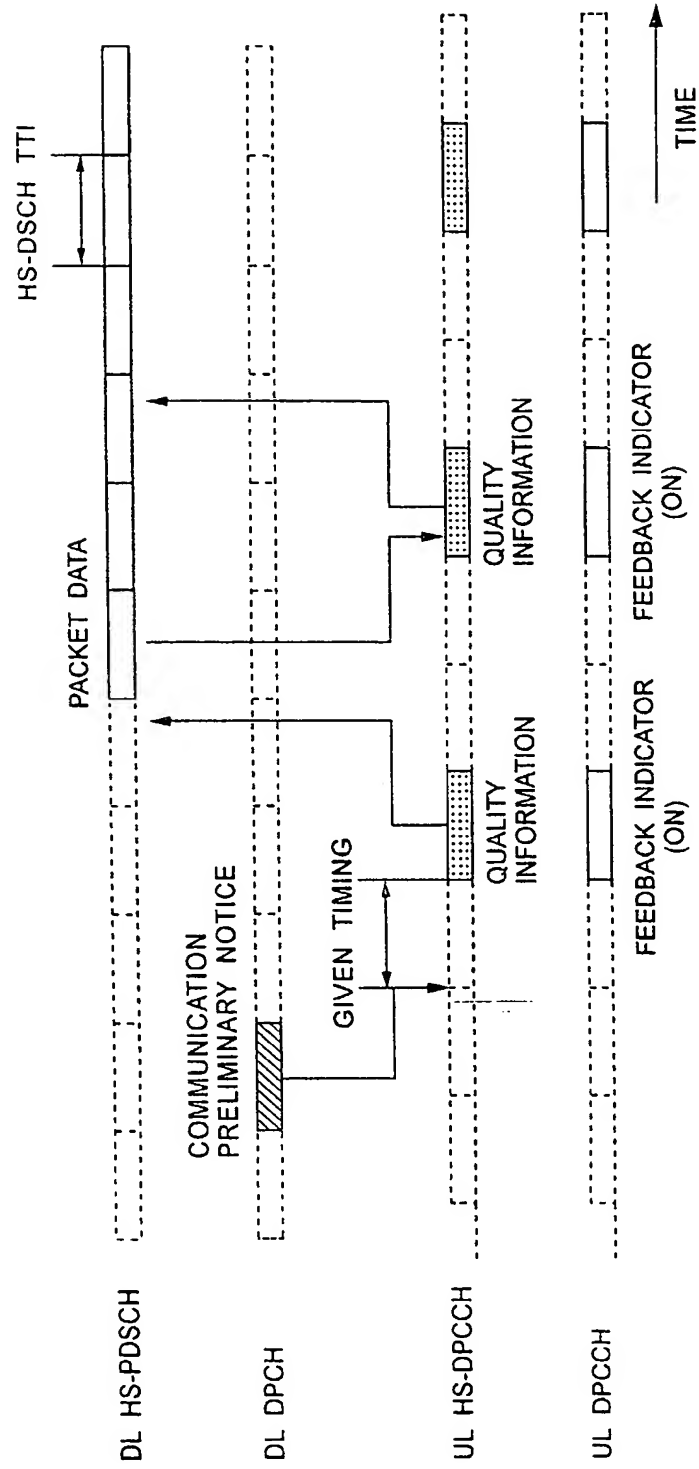


FIG. 18

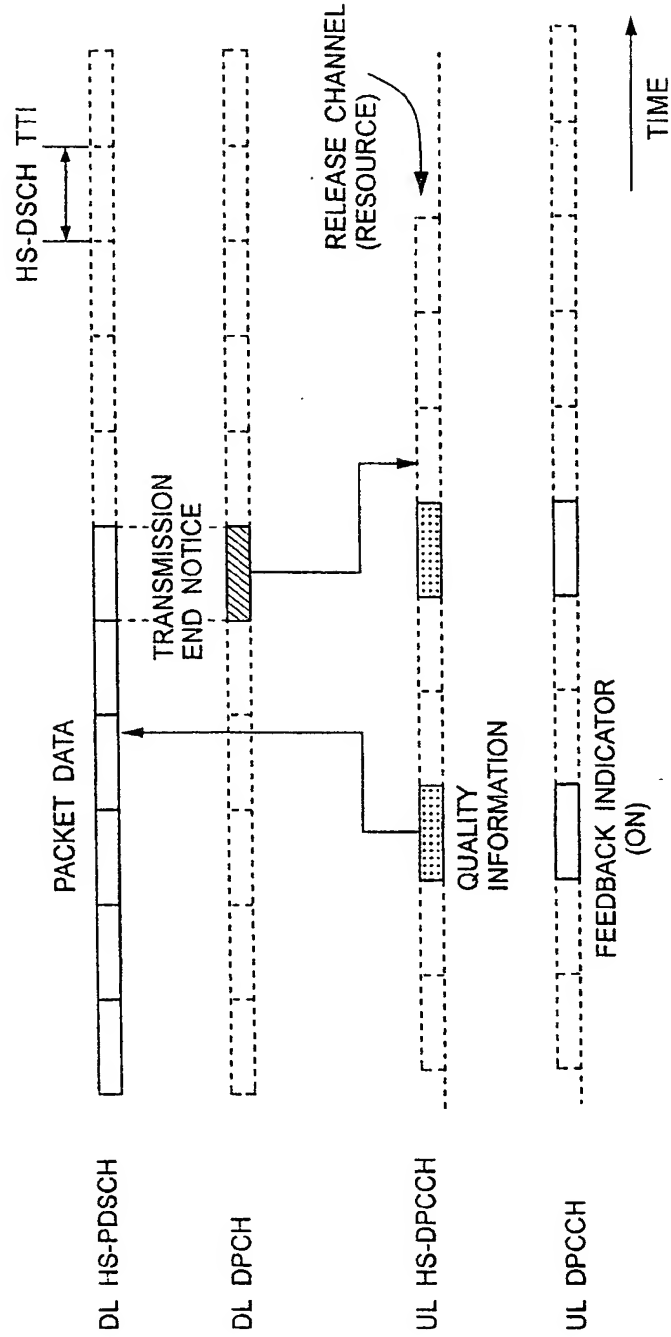


FIG.19

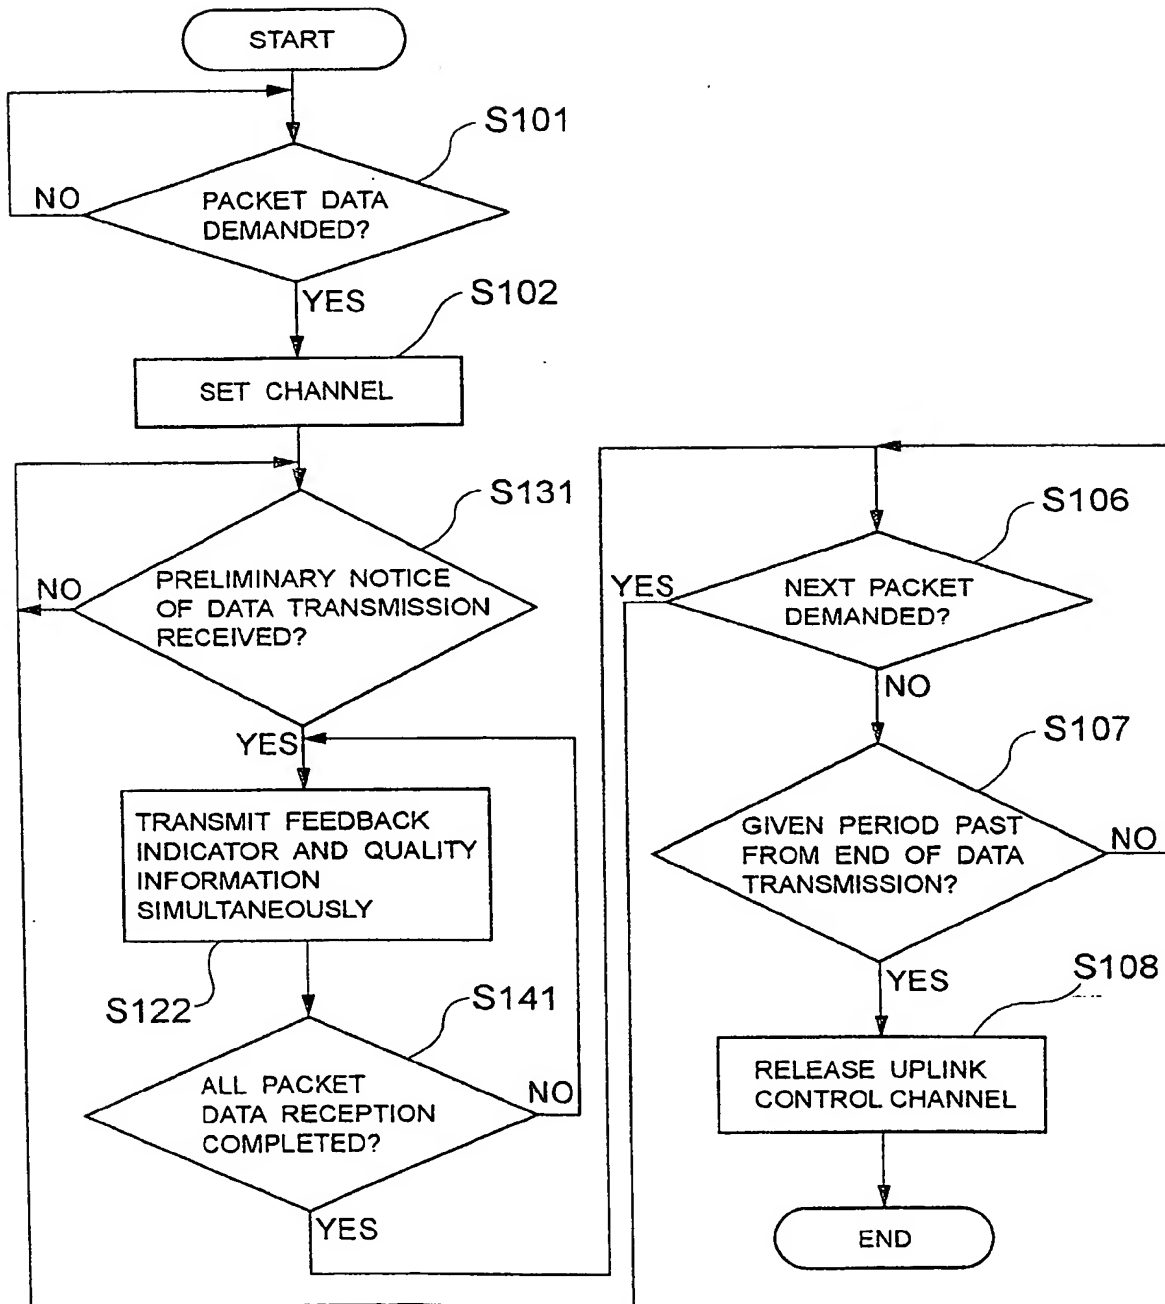


FIG. 20

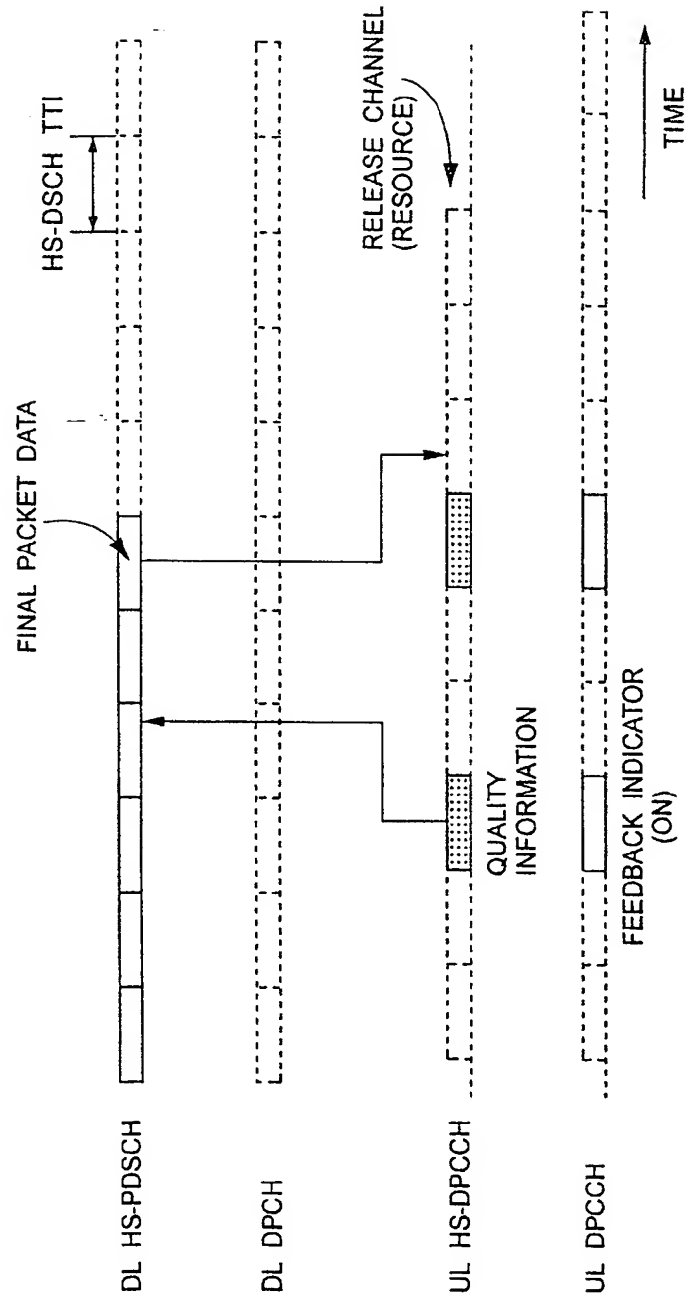


FIG.21

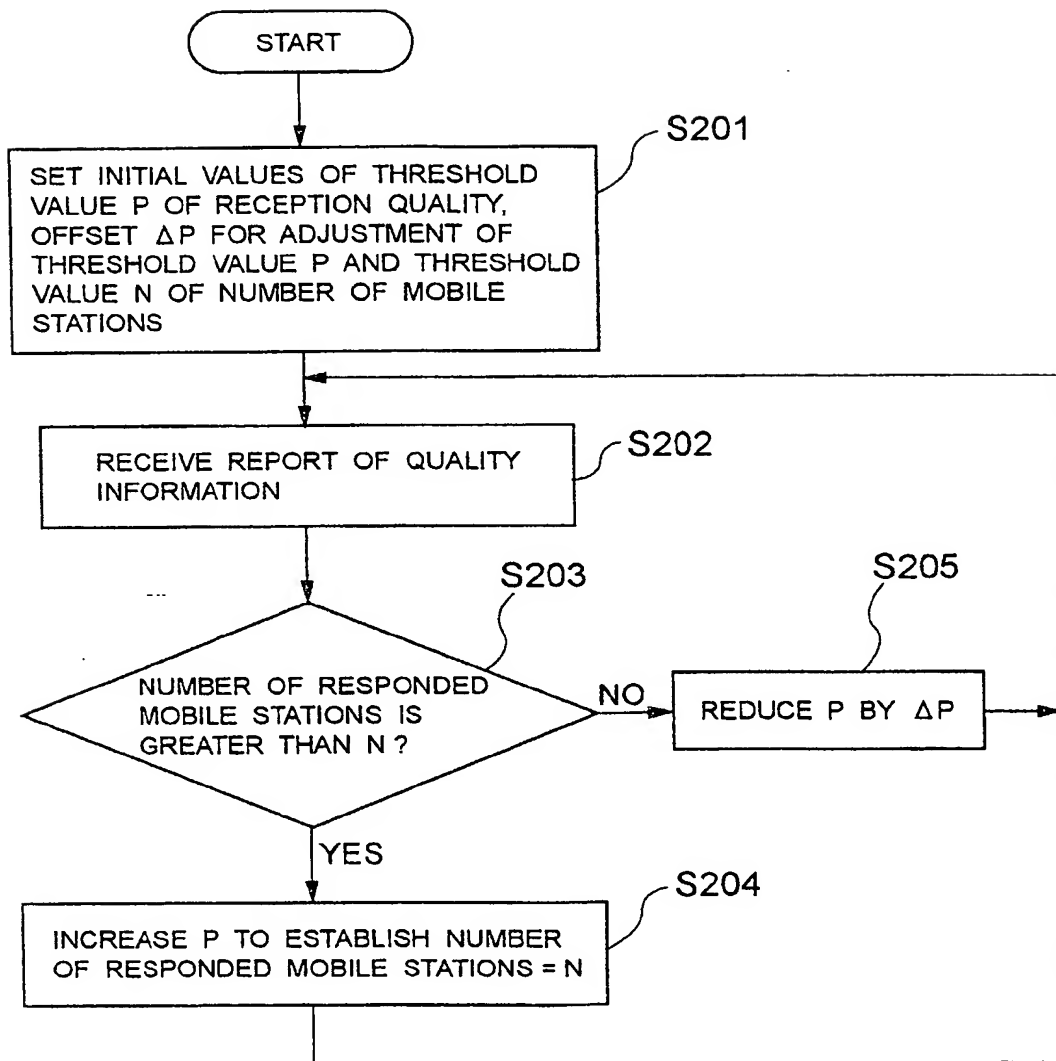


FIG.22

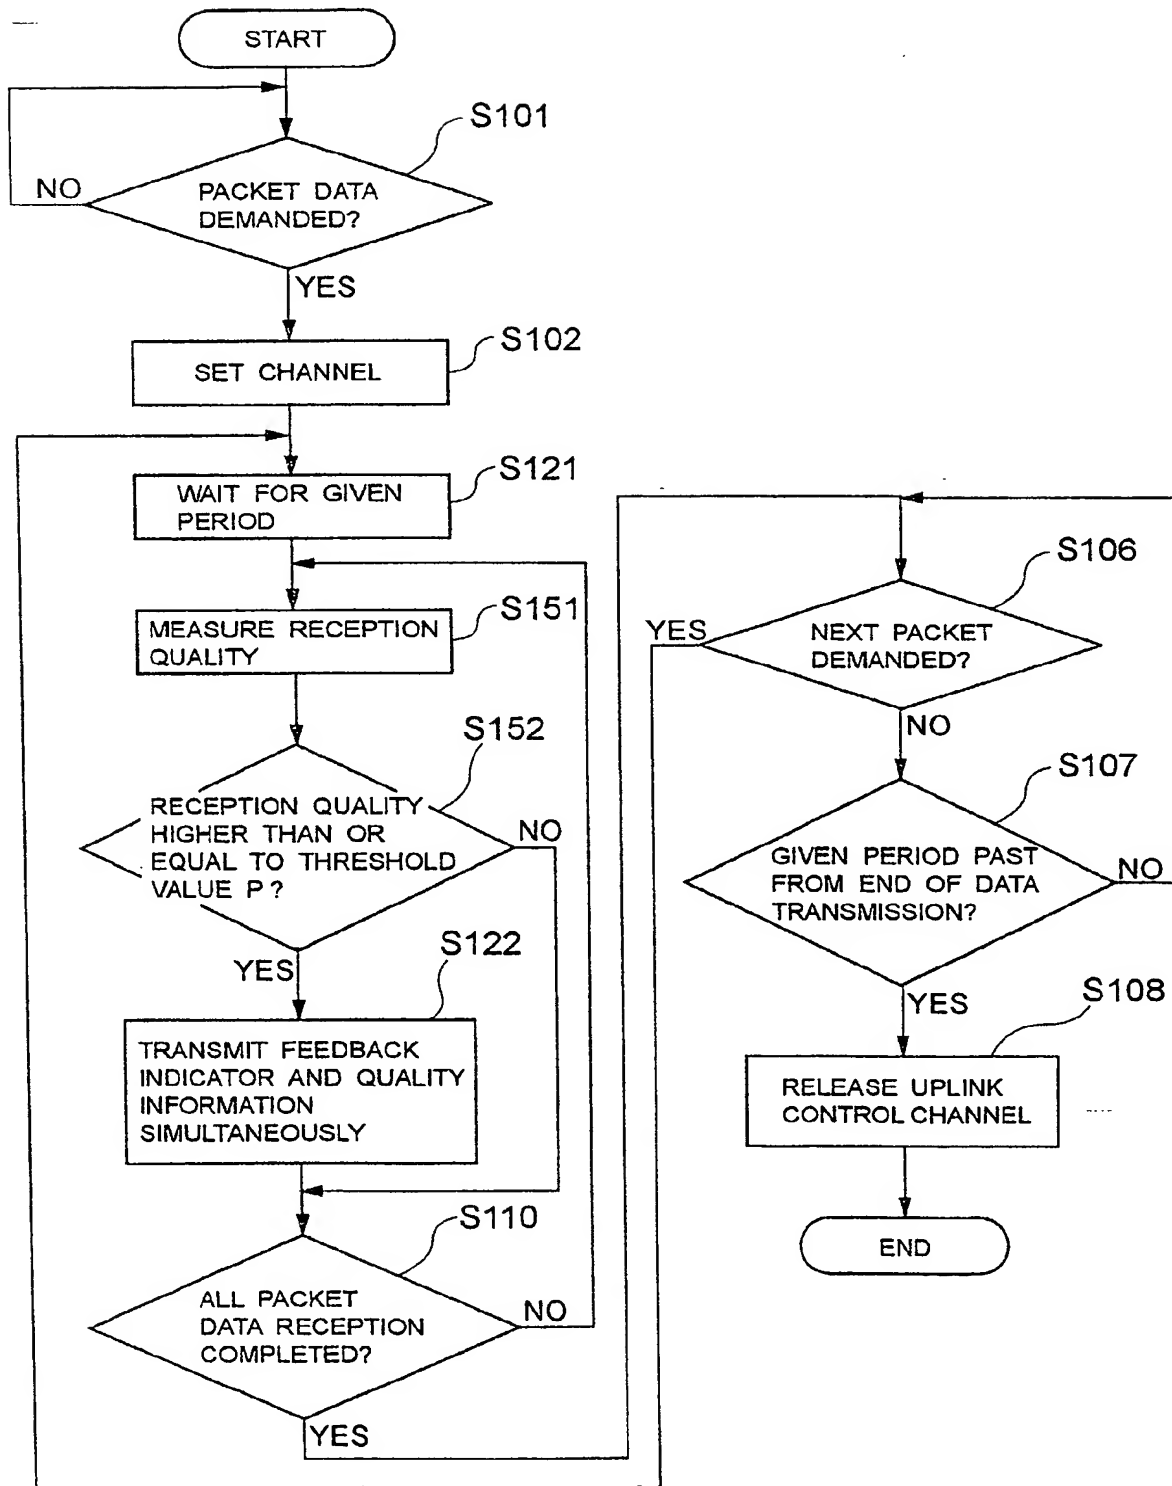


FIG. 23

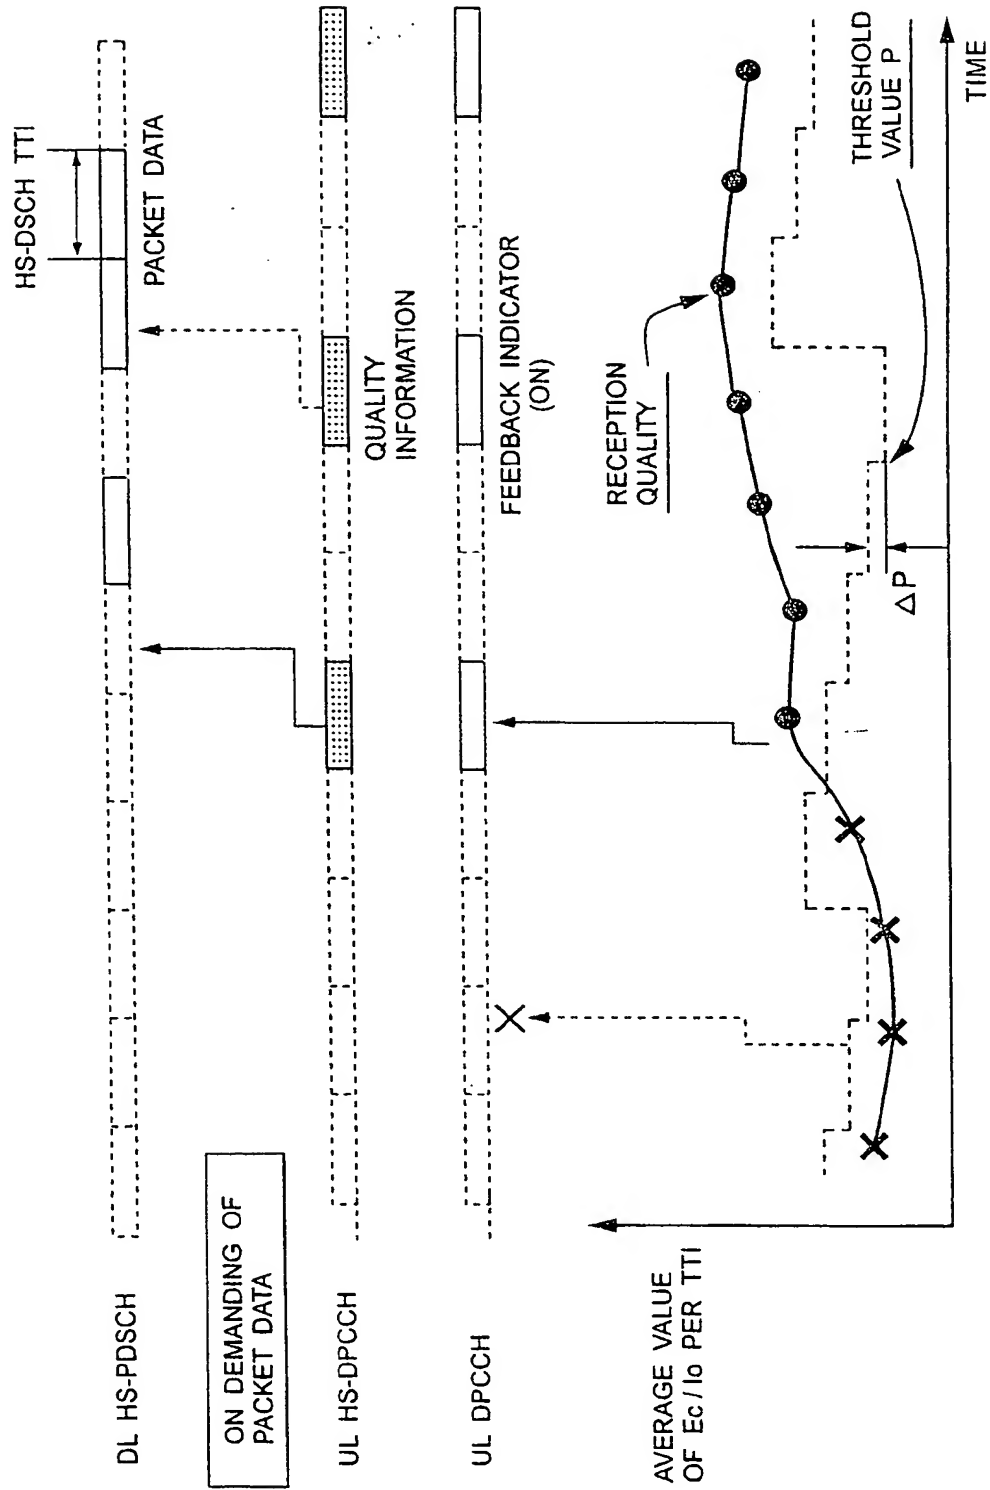


FIG. 24

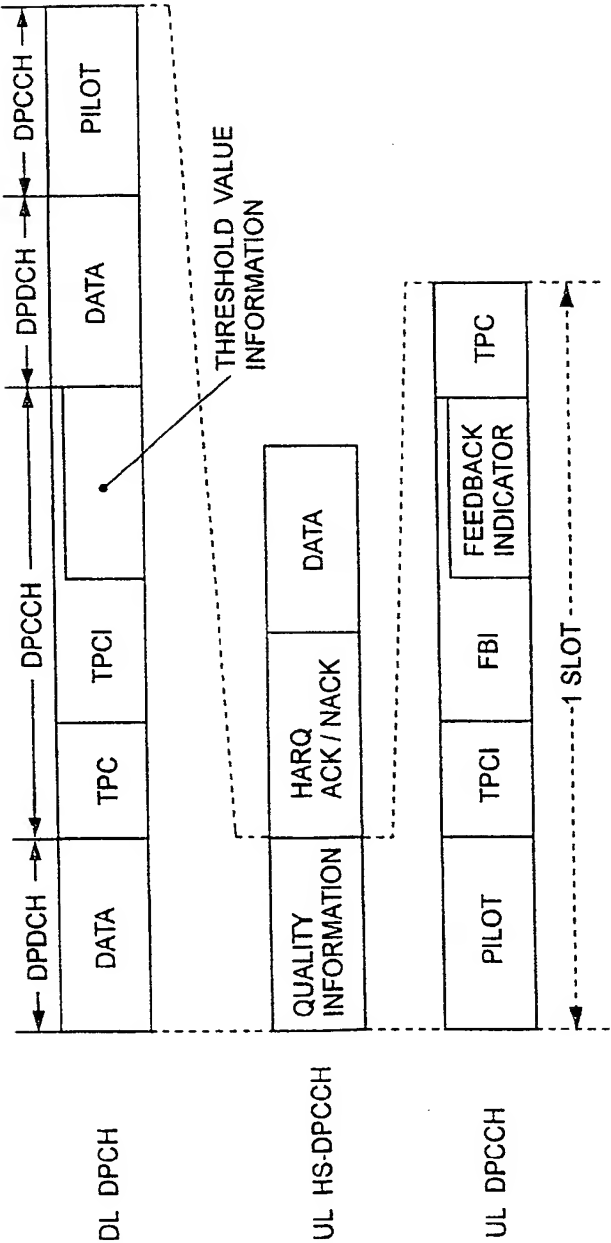


FIG. 25

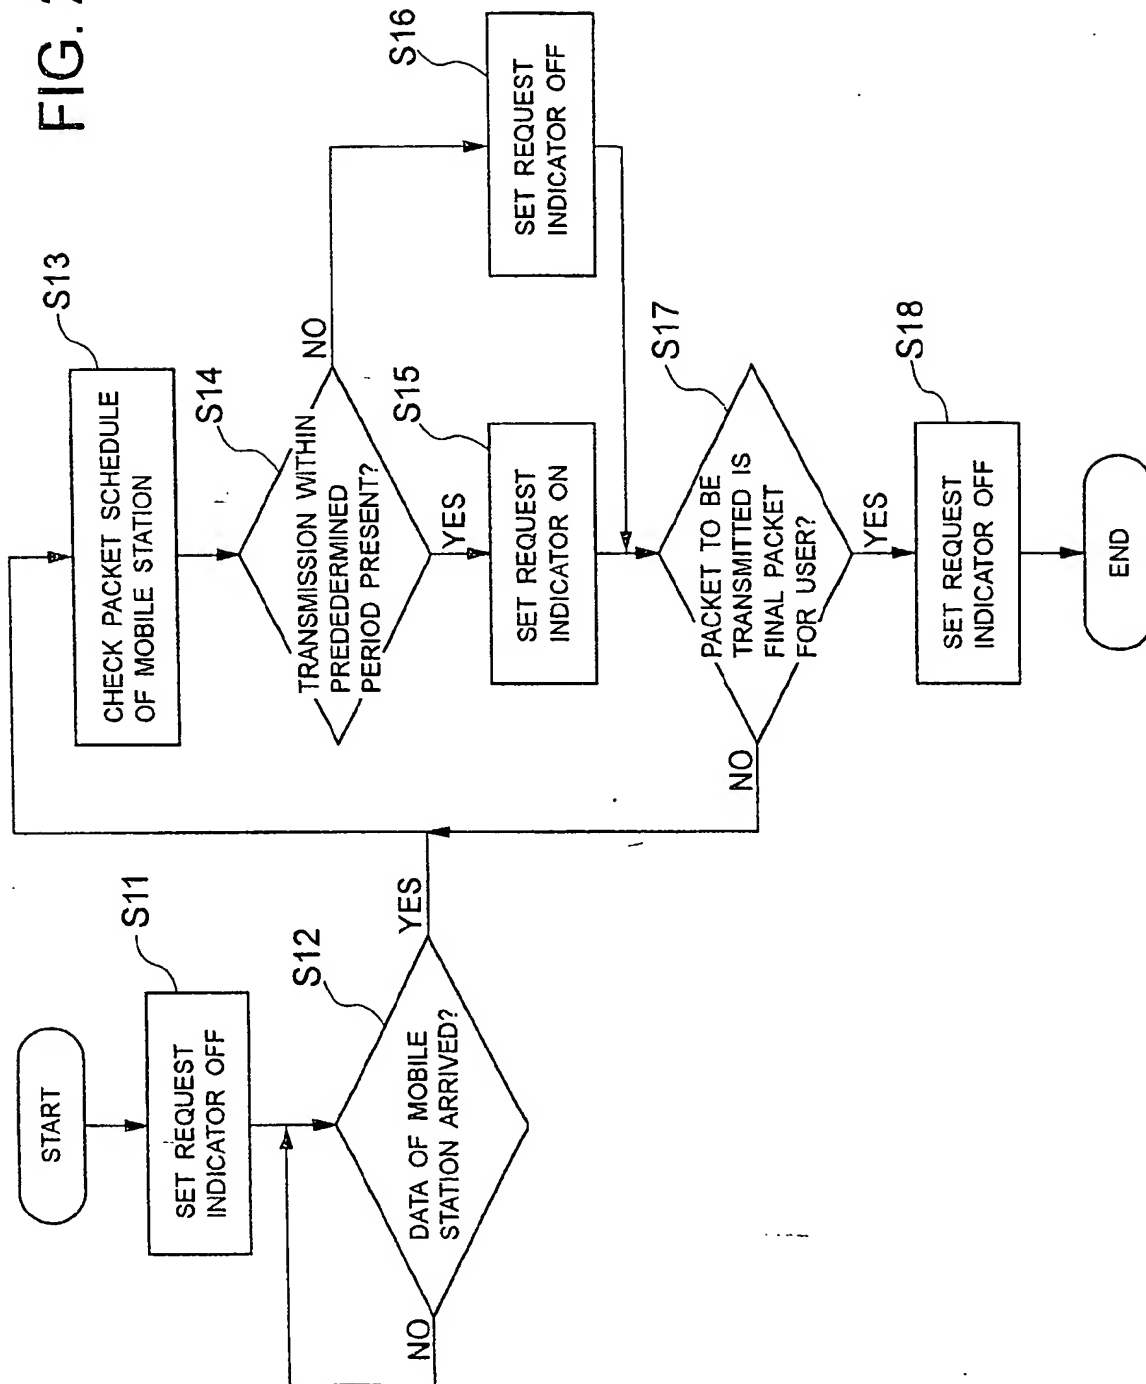


FIG.26

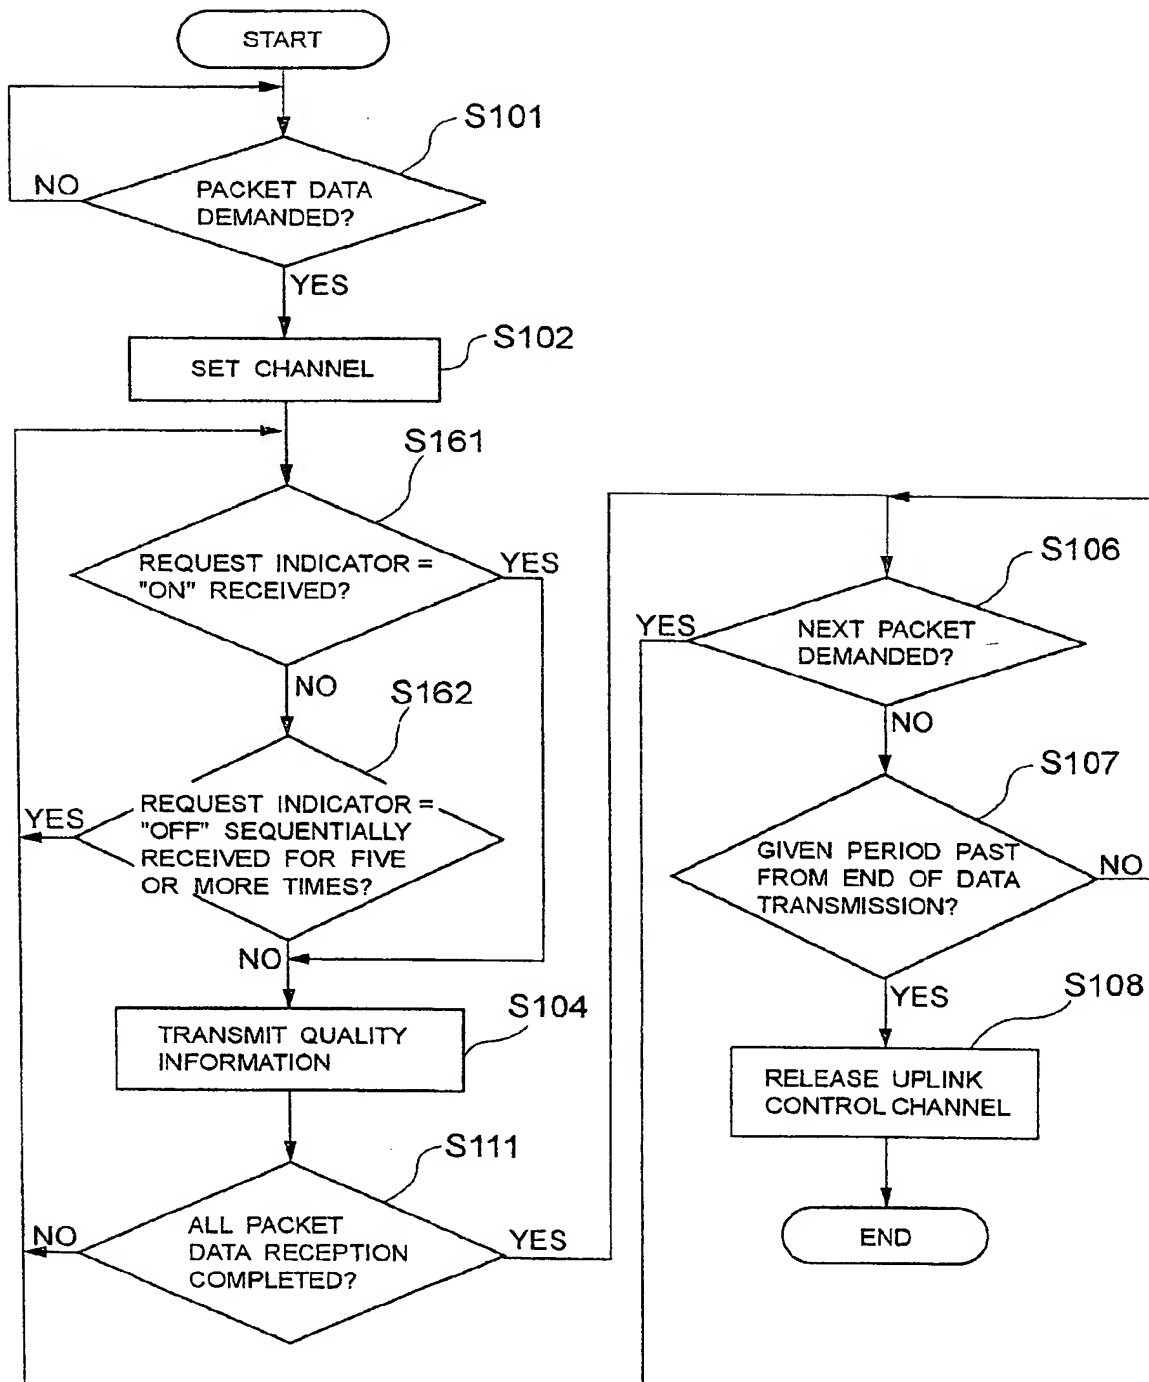


FIG. 27

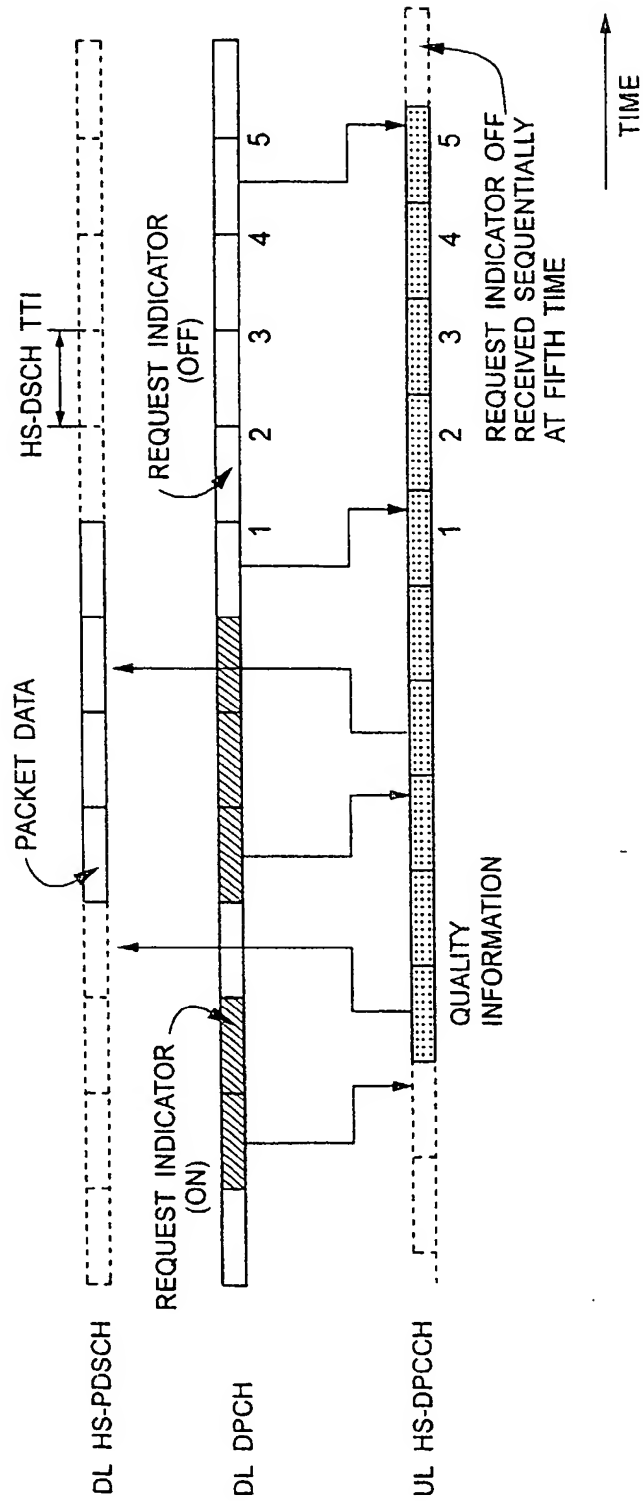


FIG. 28

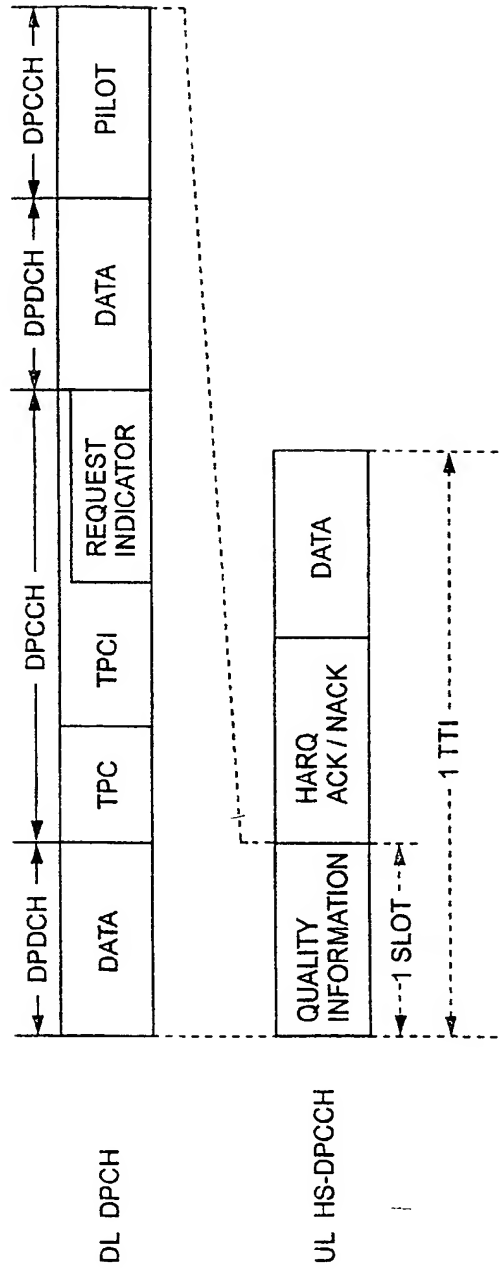


FIG.29



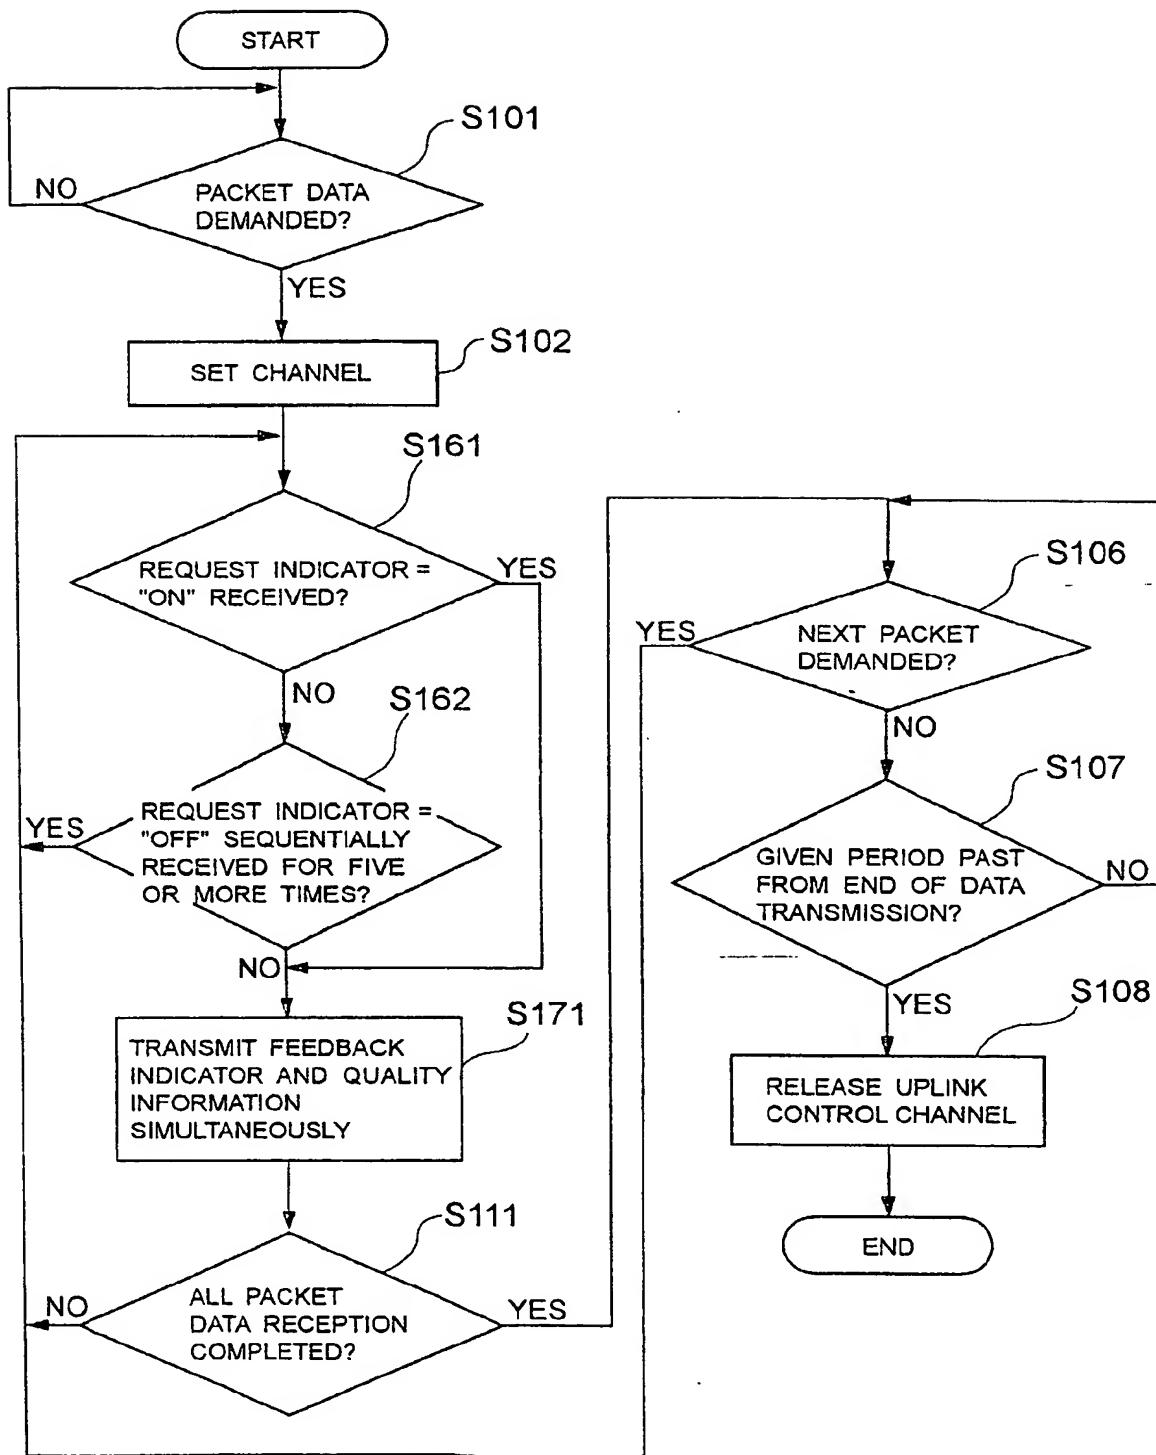


FIG. 30



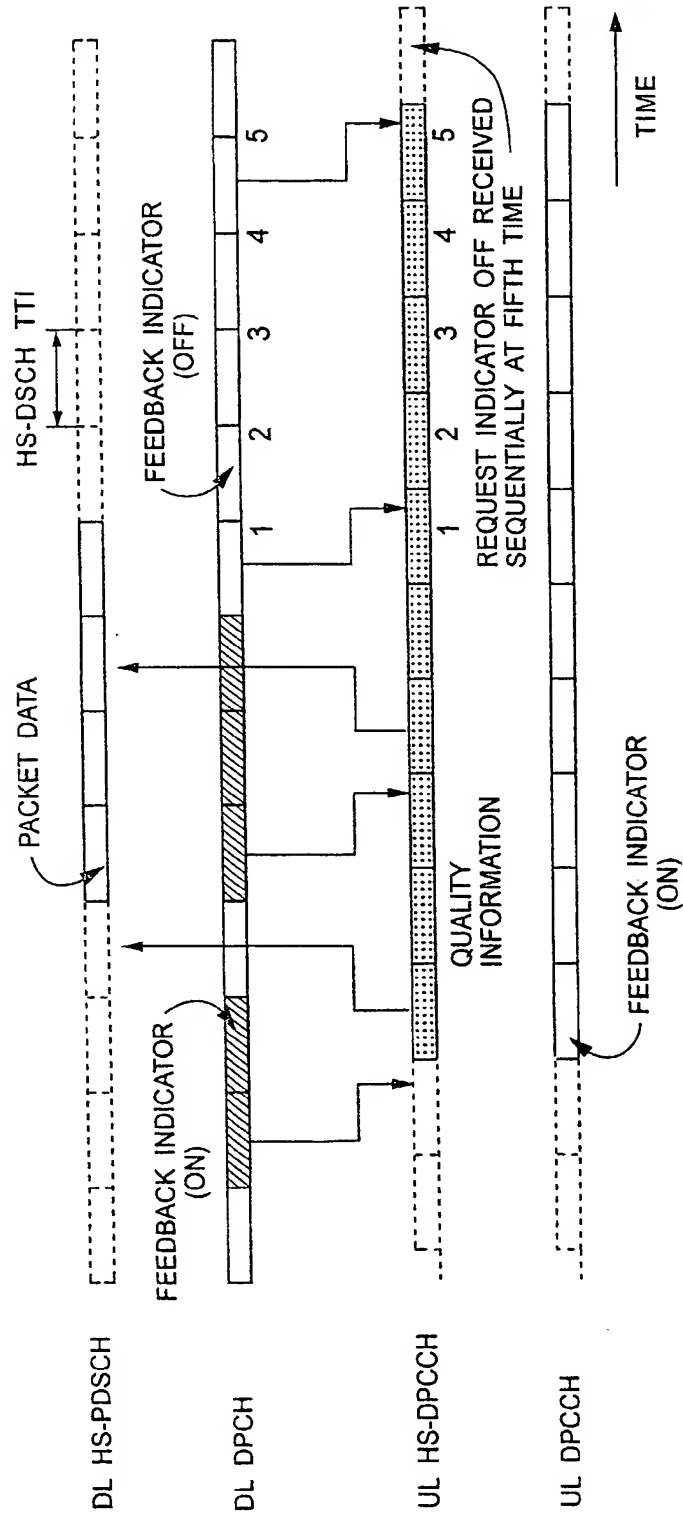

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 304 900 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
29.10.2003 Bulletin 2003/44

(51) Int Cl.7: **H04Q 7/38**

(43) Date of publication A2:
23.04.2003 Bulletin 2003/17

(21) Application number: **02090355.5**

(22) Date of filing: **17.10.2002**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
IE IT LI LU MC NL PT SE SK TR**
Designated Extension States:
AL LT LV MK RO SI

- Toshifumi, Sato
Minato-ku, Tokyo (JP)
- Motoya, Iwasaki
Minato-ku, Tokyo (JP)
- Takashi, Mochizuki
Minato-ku, Tokyo (JP)
- Naoto, Ishii
Minato-ku, Tokyo (JP)
- Kojiro, Hamabe
Minato-ku, Tokyo (JP)

(30) Priority: **17.10.2001 JP 2001318793**

(71) Applicant: **NEC CORPORATION**
Tokyo (JP)

(72) Inventors:
• Takahiro, Nobukiyo
Minato-ku, Tokyo (JP)


(74) Representative: **Patentanwälte Wenzel & Kalkoff**
Grubessallee 26
22143 Hamburg (DE)

(54) **Transmission of quality information for high speed packet data communication mode**

(57) A HSDPA type mobile communication system includes a base station and a mobile station. The base station sets the uplink control channel with the mobile station to transmit a pilot signal. The mobile station measures a reception quality of the pilot signal to transmit the quality information to the base station using the uplink quality control channel. The base station per-

forms transmission control of data for the mobile station using the quality information. The mobile station is set to perform control of starting and stopping transmission of the quality information so that the quality information is transmitted only as required. Therefore, power consumption in the mobile station can be reduced, interference wave power in the uplink can be reduced, and capacity of the uplink can be increased.

FIG. 1

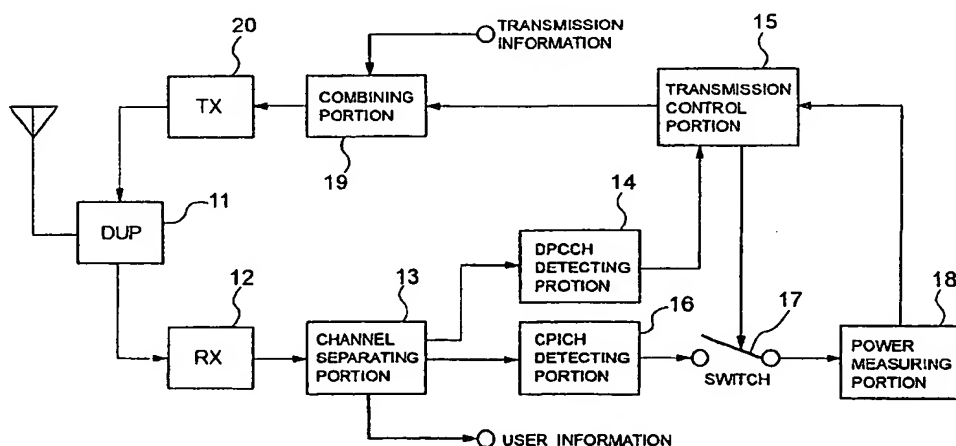



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 09 0355

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	WO 00 70897 A (ERICSSON TELEFON AB L M) 23 November 2000 (2000-11-23)	5,13,21,27	H04Q7/38
Y	* page 1, line 6 - line 13 *	1-4,6,7,9-12,14,15,17-20,22,23,25,26,28,29	
	* page 3, line 6 - line 7 *		
	* page 4, line 9 - page 5, line 19 *		
	* page 6, line 8 - line 24 *		
	* page 10, line 9 - page 12, line 15 *		
	* page 14, line 17 - page 15, line 21 *		
	* page 17, line 24 - page 18, line 15 *		
Y	--- PARKVALL S ET AL: "The high speed packet data evolution of WCDMA" IEEE INTERNATIONAL SYMPOSIUM ON PERSONAL, INDOOR AND MOBILE RADIO COMMUNICATIONS, XX, XX, vol. 2, 30 September 2001 (2001-09-30), pages 27-31, XP002209874 * page 27, right-hand column, line 27 - line 37 * * page 28, left-hand column, line 3 - line 37 * * page 28, right-hand column, line 29 - page 29, right-hand column, line 25 * * page 30, left-hand column, line 41 - line 45 *	1-4,6,7,9-12,14,15,17-20,22,23,25,26,28,29	TECHNICAL FIELDS SEARCHED (Int.Cl.7) H04Q H04B H04L
A	--- "Procedure of Gated DPCCH transmission associated with DSCH" TSG-RAN WORKING GROUP 1 MEETING, XX, XX, 1 July 2000 (2000-07-01), pages 1-4, XP002223691 * the whole document *	1-30	
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 3 September 2003	Examiner Zembery, P
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons</p> <p>& : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 82 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 09 0355

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	EP 0 987 842 A (MATSUSHITA ELECTRIC IND CO LTD) 22 March 2000 (2000-03-22) * column 4, line 23 - line 33 * * column 5, line 43 - line 52 * * column 7, line 13 - column 8, line 5 * * claim 21 *	1-30	
A	WO 98 36508 A (HAEMAELAEINEN SEPPO ;NOKIA TELECOMMUNICATIONS OY (FI); LAPPETELAEI) 20 August 1998 (1998-08-20) * page 3, line 15 - line 19 * * page 5, line 20 - line 25 *	1-30	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 3 September 2003	Examiner Zembery, P
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document</p> <p>T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons &: member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 09 0355

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03-09-2003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0070897	A	23-11-2000	US 6445917 B1	03-09-2002
			AU 4963500 A	05-12-2000
			BR 0010645 A	19-02-2002
			CN 1371579 T	25-09-2002
			EP 1179273 A1	13-02-2002
			JP 2003500909 T	07-01-2003
			WO 0070897 A1	23-11-2000
			TW 502547 B	11-09-2002
EP 0987842	A	22-03-2000	JP 2002026796 A	25-01-2002
			AU 2961399 A	25-10-1999
			EP 0987842 A1	22-03-2000
			US 6600933 B1	29-07-2003
			CN 1263655 T	16-08-2000
			WO 9952229 A1	14-10-1999
WO 9836508	A	20-08-1998	FI 970293 A	25-07-1998
			AU 733749 B2	24-05-2001
			AU 5666098 A	08-09-1998
			CN 1217840 A	26-05-1999
			CN 1108668 B	14-05-2003
			EP 0914722 A1	12-05-1999
			WO 9836508 A1	20-08-1998
			JP 2000507433 T	13-06-2000
			NO 984433 A	23-11-1998

EPO FORM P0458

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)